


URBAN BOLLARD Ch

LB6061.547-EN

CE UKCA IK08 IP65



heper⁺

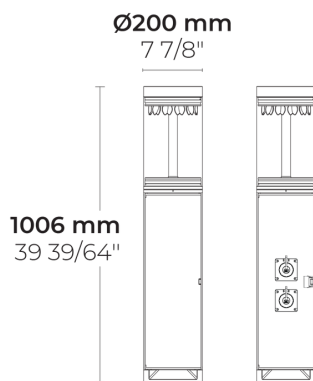

[SYM]
Symmetric - 114°

Light distribution	[SYM] 114°
Luminaire luminous flux	2096 - 2457 lm
Rated input power	30 W
CCT	2700K, 3000K, 4000K
CRI	Ra70, Ra80
Control	On/Off
Product colours	
Height	1m, Custom height (Please specify)
Luminaire efficacy	69 - 81 lm/W
Colour deviation	3 SDCM, 4 SDCM
BUG rating	B2-U0-G1
Lifetime L90B50 (hour)	>60, 000
Housing	Marine grade aluminum housing
Driver	Integral LED driver
Input voltage	220-240V 50/60Hz

Notes

As standard, 2 sockets of mono-phase are provided. Upon request, a maximum of 3 sockets with different socket types can be also provided.

Extras

Consult the factory	120-277V 50/60Hz
Luminaire body options	Double powder coating

Technical details

Certificates	CE, UKCA
Mounting	Surface mountable
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Insulation class	Class I
Weight	11.8 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver surge protection	2/2 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable

HEPER HQ - HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2,
Malıköy, Temelli, Sincan, 06909
Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 2372 568 7570
infoEU@hepergroup.com
www.heperlighting.com/de

We reserve the right to change specifications without prior written notice. Edition: 17.04.2025. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.


Project name				Type		Quantity	
Date		Note					

LB6061.547-EN-**-EN-C1-**

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM] Symmetric - 114°	[350] 30 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off	[HM1] Black [HM2] Dark grey [HM3] Anthracite grey [HM4] Light grey [HM5] White [HM6] Bronze [CC] Custom colour (Please specify RAL code)
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H01] 1m [HC] Custom height (Please specify)	Consult the factory	Anchorage s		
	[UNI] 120-277V 50/60Hz	[630]014] 630J014		
	Luminaire body options			
	[DPC] Double powder coating			

Accessories (To be ordered separately)

Anchorage



630J014

630J014

Variant code	Light distribution	Luminaire luminous flux	Rated input power	CCT	CRI	Control	BUG rating
LB6061.547-EN-SYM-350-827	[SYM] Symmetric - 114°	2096 lm	30 W	2700K	Ra80	On/Off	B2-U0-G1
LB6061.547-EN-SYM-350-830	[SYM] Symmetric - 114°	2124 lm	30 W	3000K	Ra80	On/Off	B2-U0-G1
LB6061.547-EN-SYM-350-740	[SYM] Symmetric - 114°	2457 lm	30 W	4000K	Ra70	On/Off	B2-U0-G1
LB6061.547-EN-SYM-350-840	[SYM] Symmetric - 114°	2236 lm	30 W	4000K	Ra80	On/Off	B2-U0-G1