


# URBAN BOLLARD Ch Asym

LB6061.548-EN



IK08 IP65

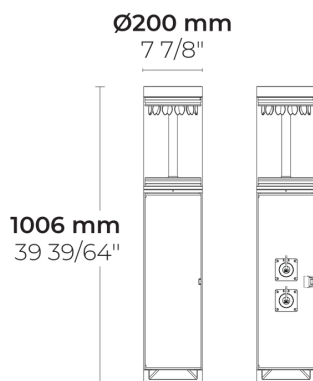

[ASYM]  
Asymmetric -  
102x45°

|                         |                                    |
|-------------------------|------------------------------------|
| Light distribution      | [ASYM] 102x45°                     |
| Luminaire luminous flux | 1048 - 1235 lm                     |
| Rated input power       | 15 W                               |
| CCT                     | 2700K, 3000K, 4000K                |
| CRI                     | Ra70, Ra80                         |
| Control                 | On/Off                             |
| Product colours         |                                    |
| Height                  | 1m, Custom height (Please specify) |
| Luminaire efficacy      | 69 - 82 lm/W                       |
| Colour deviation        | 3 SDCM, 4 SDCM                     |
| BUG rating              | B2-U0-G1                           |
| Lifetime L90B50 (hour)  | >60, 000                           |
| Housing                 | Marine grade aluminum housing      |
| Driver                  | Integral LED driver                |
| Input voltage           | 220-240V 50/60Hz                   |

## Notes

As standard, 2 sockets of mono-phase are provided. Upon request, a maximum of 3 sockets with different socket types can be also provided.

## Extras

|                        |                       |
|------------------------|-----------------------|
| Consult the factory    | 120-277V 50/60Hz      |
| Luminaire body options | Double powder coating |

## Technical details

|                         |                                                                           |
|-------------------------|---------------------------------------------------------------------------|
| Certificates            | CE, UKCA                                                                  |
| Mounting                | Surface mountable                                                         |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| Gasket                  | Silicone                                                                  |
| Lens / Reflector        | High reflectance aluminium coating, multifaceted micro reflector          |
| Glass / Diffusor        | UV stable, bio-based polycarbonate diffusor                               |
| Impact protection       | IK08                                                                      |
| Ingress protection      | IP65                                                                      |
| Insulation class        | Class I                                                                   |
| Weight                  | 11.8 kg                                                                   |
| LED module              | Multi-chip high power LEDs on metal-core PCB                              |
| Driver surge protection | 2/2 kV                                                                    |
| Power factor            | > 0.90                                                                    |
| Through wiring          | Single cable entry                                                        |
| Operating temperature   | -40...50°C                                                                |
| Cable                   | 0.5 m of flexible cable                                                   |

HEPER HQ - HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2,  
Malıköy, Temelli, Sincan, 06909  
Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 2372 568 7570  
infoEU@hepergroup.com  
www.heperlighting.com/de

We reserve the right to change specifications without prior written notice. Edition: 17.04.2025. For current version visit [heperlighting.com](http://heperlighting.com). All flux ( $\pm 7\%$  tolerance) and power values ( $\pm 10\%$  tolerance) are derived following appropriate IES, CIE, and applicable standards.

|              |  |      |  |      |  |          |  |
|--------------|--|------|--|------|--|----------|--|
| Project name |  |      |  | Type |  | Quantity |  |
| Date         |  | Note |  |      |  |          |  |


**LB6061.548-EN-\_\_-\_\_-\_\_-\_\_-EN-C1-\_\_-\_\_-\_\_-\_\_**

| Light distribution                                                      | Rated input power                     | Colour temperature                                                                                                                           | Control                  | Product colours                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------------------------------------------------|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>[ASYM]</b><br>Asymmetric - 102x45°                                   | <b>[350]</b><br>15 W                  | <b>[827]</b><br>2700 K CRI 80<br><br><b>[830]</b><br>3000 K CRI 80<br><br><b>[740]</b><br>4000 K CRI 70<br><br><b>[840]</b><br>4000 K CRI 80 | <b>[ONOFF]</b><br>On/Off | <div> <b>[HM1]</b>  Black </div> <div> <b>[HM2]</b>  Dark grey </div> <div> <b>[HM3]</b>  Anthracite grey </div> <div> <b>[HM4]</b>  Light grey </div> <div> <b>[HM5]</b>  White </div> <div> <b>[HM6]</b>  Bronze </div> <div> <b>[CC]</b>  Custom colour (Please specify RAL code) </div> |
| Height                                                                  | Extras                                | Accessories ( <i>To be ordered separately</i> )                                                                                              |                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>[H01]</b><br>1m<br><br><b>[HC]</b><br>Custom height (Please specify) | <b>Consult the factory</b>            | <b>Anchorage</b>                                                                                                                             |                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                                                                         | <b>[UNI]</b><br>120-277V 50/60Hz      | <b>[630]014</b><br>630J014                                                                                                                   |                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                                                                         | <b>Luminaire body options</b>         |                                                                                                                                              |                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                                                                         | <b>[DPC]</b><br>Double powder coating |                                                                                                                                              |                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## Accessories (To be ordered separately)

---

### Anchorage



**630J014**

630J014

| Variant code               | Light distribution          | Luminaire<br>luminous<br>flux | Rated<br>input<br>power | CCT    | CRI  | Control | BUG<br>rating |
|----------------------------|-----------------------------|-------------------------------|-------------------------|--------|------|---------|---------------|
| LB6061.548-EN-ASYM-350-827 | [ASYM] Asymmetric - 102x45° | 1048 lm                       | 15 W                    | 2700 K | Ra80 | On/Off  | B2-U0-G1      |
| LB6061.548-EN-ASYM-350-830 | [ASYM] Asymmetric - 102x45° | 1064 lm                       | 15 W                    | 3000 K | Ra80 | On/Off  | B2-U0-G1      |
| LB6061.548-EN-ASYM-350-740 | [ASYM] Asymmetric - 102x45° | 1235 lm                       | 15 W                    | 4000 K | Ra70 | On/Off  | B2-U0-G1      |
| LB6061.548-EN-ASYM-350-840 | [ASYM] Asymmetric - 102x45° | 1118 lm                       | 15 W                    | 4000 K | Ra80 | On/Off  | B2-U0-G1      |