


DRAGO Forward Duo

LB6068.570-EN



IK08 IP66

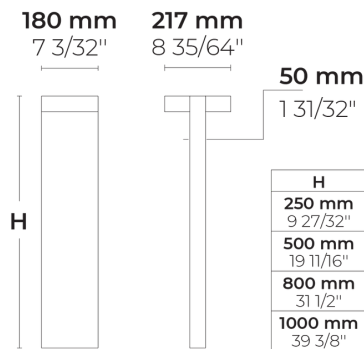

[SLF]
Special linear,
Forward throw -
65x70°



[SLF-FG]
Special linear,
Forward throw -
Frosted Glass -
110x75°

Light distribution
Luminaire luminous flux
Rated input power
CCT
CRI
Control
Product colours
Height
Luminaire efficacy
Colour deviation
BUG rating
Lifetime L90B50 (hour)
Housing
Driver
Input voltage

[SLF] 65x70°, [SLF-FG] 110x75°
1548 - 3292 lm
20 - 40 W
2700K, 3000K, 4000K
Ra80
On/Off, DALI

25cm, 50cm, 80cm, 1m, Custom height
(Please specify)
70 - 93 lm/W
3 SDCM
B1-U0-G1
>42, 000
Marine grade aluminum housing
Integral LED driver
220-240V 50/60Hz

Notes

3000K CCT or warmer must be selected to be DarkSky International certified., The photometry download contains two separate files, each representing one side of the lighting fixture. To accurately obtain the lighting characteristics for a double-headed layout, both files must be imported into the design software., For Wood-Look options, only the body part will be covered as the chosen texture. The head will be painted with HM2 standard colour.

Extras

Consult the factory
Luminaire body options

120-277V 50/60Hz
Double powder coating

Technical details

Certificates
Mounting
Finishing
Fasteners
Gasket
Lens / Reflector
Glass / Diffusor
Impact protection
Ingress protection
Insulation class
Weight
LED module
Driver surge protection
Power factor
Through wiring
Operating temperature
Cable

CE, UKCA, DarkSky Approved
Surface mountable
Chromate conversion pretreatment followed by electrostatic powder coating
Stainless steel (AISI 304 / EN 1.4301 grade)
Liquid silicone
High reflectance aluminium coating, multifaceted micro reflector
Tempered safety glass
IK08
IP66
Class I
4.11 kg (0.25 m), 5.67 kg (0.8 m)
High power LEDs on metal-core PCB
1/1 kV
> 0.90
Single cable entry
-40...50°C
0.2 m of flexible cable

HEPER HQ - HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2,
Malıköy, Temelli, Sincan, 06909
Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 2372 568 7570
infoEU@hepergroup.com
www.heperlighting.com/de

We reserve the right to change specifications without prior written notice. Edition: 16.01.2026. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.


Project name				Type		Quantity	
Date		Note					

LB6068.570-EN-__-__-__-__-EN-C1-__-__-__-__

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SLF] Special linear, Forward throw - 65x70° [SLF-FG] Special linear, Forward throw - Frosted Glass - 110x75°	[350] 20 W [700] 40 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[HM1]  Black [HM2]  Dark grey [HM3]  Anthracite grey [HM4]  Light grey [HM5]  White [HM6]  Bronze [CC]  Custom colour (Please specify RAL code)
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H00.25] 25cm [H00.50] 50cm [H00.80] 80cm [H01] 1m [HC] Custom height (Please specify)	Consult the factory	Anchorage		
	[UNI] 120-277V 50/60Hz	[628I000] 628I000		
	Luminaire body options			
	[DPC] Double powder coating			

Accessories (To be ordered separately)

Anchorage



628I000

628I000

Variant code	Light distribution	Luminaire luminous flux	Rated input power	CCT	CRI	Control	BUG rating
LB6068.570-EN-SLF-FG-350-827	[SLF-FG] Special linear, Forward throw - Frosted Glass - 110x75°	1548 lm	20 W	2700 K	Ra80	On/Off, DALI	
LB6068.570-EN-SLF-350-827	[SLF] Special linear, Forward throw - 65x70°	1698 lm	20 W	2700 K	Ra80	On/Off, DALI	B1-U0-G1
LB6068.570-EN-SLF-FG-350-830	[SLF-FG] Special linear, Forward throw - Frosted Glass - 110x75°	1608 lm	20 W	3000 K	Ra80	On/Off, DALI	
LB6068.570-EN-SLF-350-830	[SLF] Special linear, Forward throw - 65x70°	1762 lm	20 W	3000 K	Ra80	On/Off, DALI	B1-U0-G1
LB6068.570-EN-SLF-FG-350-840	[SLF-FG] Special linear, Forward throw - Frosted Glass - 110x75°	1696 lm	20 W	4000 K	Ra80	On/Off, DALI	
LB6068.570-EN-SLF-350-840	[SLF] Special linear, Forward throw - 65x70°	1858 lm	20 W	4000 K	Ra80	On/Off, DALI	B1-U0-G1
LB6068.570-EN-SLF-FG-700-827	[SLF-FG] Special linear, Forward throw - Frosted Glass - 110x75°	2794 lm	40 W	2700 K	Ra80	On/Off, DALI	
LB6068.570-EN-SLF-700-827	[SLF] Special linear, Forward throw - 65x70°	3012 lm	40 W	2700 K	Ra80	On/Off, DALI	B1-U0-G1
LB6068.570-EN-SLF-FG-700-830	[SLF-FG] Special linear, Forward throw - Frosted Glass - 110x75°	2908 lm	40 W	3000 K	Ra80	On/Off, DALI	
LB6068.570-EN-SLF-700-830	[SLF] Special linear, Forward throw - 65x70°	3136 lm	40 W	3000 K	Ra80	On/Off, DALI	B1-U0-G1
LB6068.570-EN-SLF-FG-700-840	[SLF-FG] Special linear, Forward throw - Frosted Glass - 110x75°	3054 lm	40 W	4000 K	Ra80	On/Off, DALI	
LB6068.570-EN-SLF-700-840	[SLF] Special linear, Forward throw - 65x70°	3292 lm	40 W	4000 K	Ra80	On/Off, DALI	B1-U0-G1