

CORVUS S


LB6074.555-EN



IK08 IP65



NEW

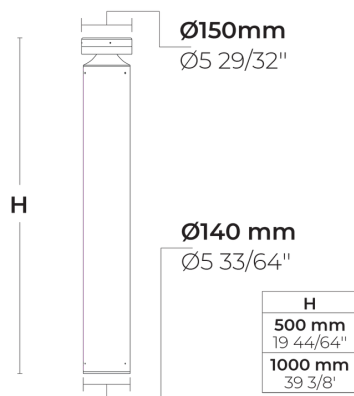

[SYM]
Symmetric - 139°

Light distribution	[SYM] 139°
Luminaire luminous flux	786 - 830 lm
Rated input power	21 W
CCT	2700K, 3000K, 4000K
CRI	Ra80
Control	On/Off, DALI
Product colours	
Height	50cm, 1m, Custom height (Please specify)
Luminaire efficacy	37 - 40 lm/W
Colour deviation	3 SDCM
Lifetime L90B50 (hour)	>102 000
Housing	Marine grade aluminum housing
Driver	Integral LED driver
Input voltage	220-240V 50/60Hz
Notes	For specifications with Turtle Friendly options and photometry files, please contact the factory.

Extras

Light output	Constant light output, Turtle Friendly
Consult the factory	120-277V 50/60Hz
Luminaire body options	Double powder coating

Technical details

Certificates	CE, UKCA, Turtle Friendly
Mounting	Surface mountable
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffuser	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Insulation class	Class I
Weight	3.8 kg (0.5m), 5.5 kg (1m)
LED module	Mid power LEDs on metal-core PCB
Driver surge protection	3/3 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable

HEPER HQ - HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2,
Malıköy, Temelli, Sincan, 06909
Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 2372 568 7570
infoEU@hepergroup.com
www.heperlighting.com/de

We reserve the right to change specifications without prior written notice. Edition: 25.08.2026. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.


Project name				Type		Quantity	
Date		Note					

LB6074.555-EN-**-EN-C1-**

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM] Symmetric - 139°	[550] 21 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[HM1] Black [HM2] Dark grey [HM3] Anthracite grey [HM4] Light grey [HM5] White [HM6] Bronze [CC] Custom colour (Please specify RAL code)
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H00.50] 50cm [H01] 1m [HC] Custom height (Please specify)	Light output	Anchorages		
	[CLO] Constant light output	[623I001] 623I001		
	[TF] Turtle Friendly			
	Consult the factory			
	[UNI] 120-277V 50/60Hz			
	Luminaire body options			
	[DPC] Double powder coating			

Accessories (To be ordered separately)

Anchorage



623I001

623I001

Variant code	Light distribution	Luminaire luminous flux	Rated input power	CCT	CRI	Control	BUG rating
LB6074.555-EN-SYM-550-827	[SYM] Symmetric - 139°	786 lm	21 W	2700K	Ra80		
LB6074.555-EN-SYM-550-830	[SYM] Symmetric - 139°	808 lm	21 W	3000K	Ra80		
LB6074.555-EN-SYM-550-840	[SYM] Symmetric - 139°	830 lm	21 W	4000K	Ra80		