


DRAGO Ex Side

LB7035.585-EN

CE UKCA IK08 IP66

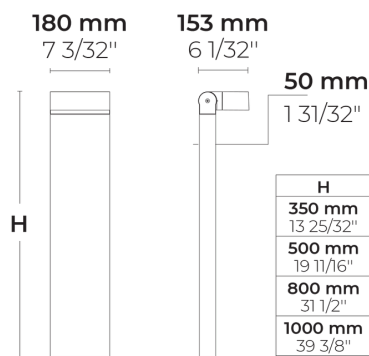

[SLS]
Special linear, Side
throw - 145x45°

[SLS-FG]
Special linear, Side
throw - Frosted Glass
- 158x60°

Light distribution

Luminaire luminous flux

Rated input power

CCT

CRI

Control

Product colours



Height

Luminaire efficacy

Colour deviation

BUG rating

Lifetime L90B50 (hour)

Housing

Driver

Input voltage

[SLS] 145x45°, [SLS-FG] 158x60°

307 - 791 lm

5 - 10 W

2700K, 3000K, 4000K

Ra80

On/Off, DALI

35cm, 50cm, 80cm, 1m, Custom height
(Please specify)

52 - 93 lm/W

3 SDCM

B0-U0-G0, B1-U0-G1

>42, 000

Marine grade aluminum housing

Integral LED driver

220-240V 50/60Hz

For Wood-Look options, only the body part
will be covered as the chosen texture. The
head will be painted with HM2 standard
colour.

Notes

Extras

Connectivity

Consult the factory

Luminaire body options

Motion sensor

Emergency kit, 120-277V 50/60Hz

Double powder coating

Technical details

Certificates

Mounting

Tilt angle

Finishing

Fasteners

Gasket

Lens / Reflector

Glass / Diffusor

Impact protection

Ingress protection

Insulation class

Weight

LED module

Driver surge protection

Power factor

Through wiring

Operating temperature

Cable

CE, UKCA

Surface mountable

+135°/0°

Chromate conversion pretreatment
followed by electrostatic powder coating
Stainless steel (AISI 304 / EN 1.4301 grade)

Liquid silicone

High reflectance aluminium coating,
multifaceted micro reflector

Tempered safety glass

IK08

IP66

Class I

4.50 kg (0.35 m), 6.0 kg (0.8 m)

High power LEDs on metal-core PCB

1/1 kV

> 0.90

Single cable entry

-40...50°C

0.2 m of flexible cable

HEPER HQ - HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2,
Malıköy, Temelli, Sincan, 06909
Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 2372 568 7570
infoEU@hepergroup.com
www.heperlighting.com/de

We reserve the right to change specifications without prior
written notice. Edition: 16.01.2026. For current version visit
heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values
($\pm 10\%$ tolerance) are derived following appropriate IES, CIE,
and applicable standards.


Project name				Type		Quantity	
Date		Note					

LB7035.585-EN-__-__-__-__-EN-C1-__-__-__-__-__

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SLS] Special linear, Side throw - 145x45° [SLS-FG] Special linear, Side throw - Frosted Glass - 158x60°	[350] 5 W [700] 10 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[HM1]  Black [HM2]  Dark grey [HM3]  Anthracite grey [HM4]  Light grey [HM5]  White [HM6]  Bronze [CC]  Custom colour (Please specify RAL code)
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H00.35] 35cm [H00.50] 50cm [H00.80] 80cm [H01] 1m [HC] Custom height (Please specify)	Connectivity	Anchorage		
	[MS] Motion sensor	[628I000] 628I000		
	Consult the factory			
	[EK] Emergency kit			
	[UNI] 120-277V 50/60Hz			
	Luminaire body options [DPC] Double powder coating			

Accessories (To be ordered separately)

Anchorage



628I000
628I000

Variant code	Light distribution	Luminaire luminous flux	Rated input power	CCT	CRI	Control	BUG rating
LB7035.585-EN-SLS-700-827	[SLS] Special linear, Side throw - 145x45°	723 lm	10 W	2700 K	Ra80	On/Off, DALI	B1-U0-G1
LB7035.585-EN-SLS-FG-700-827	[SLS-FG] Special linear, Side throw - Frosted Glass - 158x60°	517 lm	10 W	2700 K	Ra80	On/Off, DALI	
LB7035.585-EN-SLS-700-830	[SLS] Special linear, Side throw - 145x45°	753 lm	10 W	3000 K	Ra80	On/Off, DALI	B1-U0-G1
LB7035.585-EN-SLS-FG-700-830	[SLS-FG] Special linear, Side throw - Frosted Glass - 158x60°	537 lm	10 W	3000 K	Ra80	On/Off, DALI	
LB7035.585-EN-SLS-700-840	[SLS] Special linear, Side throw - 145x45°	791 lm	10 W	4000 K	Ra80	On/Off, DALI	B1-U0-G1
LB7035.585-EN-SLS-FG-700-840	[SLS-FG] Special linear, Side throw - Frosted Glass - 158x60°	566 lm	10 W	4000 K	Ra80	On/Off, DALI	
LB7035.585-EN-SLS-350-827	[SLS] Special linear, Side throw - 145x45°	427 lm	5 W	2700 K	Ra80	On/Off, DALI	B0-U0-G0
LB7035.585-EN-SLS-FG-350-827	[SLS-FG] Special linear, Side throw - Frosted Glass - 158x60°	307 lm	5 W	2700 K	Ra80	On/Off, DALI	
LB7035.585-EN-SLS-350-830	[SLS] Special linear, Side throw - 145x45°	443 lm	5 W	3000 K	Ra80	On/Off, DALI	B0-U0-G0
LB7035.585-EN-SLS-FG-350-830	[SLS-FG] Special linear, Side throw - Frosted Glass - 158x60°	318 lm	5 W	3000 K	Ra80	On/Off, DALI	
LB7035.585-EN-SLS-350-840	[SLS] Special linear, Side throw - 145x45°	465 lm	5 W	4000 K	Ra80	On/Off, DALI	B0-U0-G0
LB7035.585-EN-SLS-FG-350-840	[SLS-FG] Special linear, Side throw - Frosted Glass - 158x60°	335 lm	5 W	4000 K	Ra80	On/Off, DALI	