
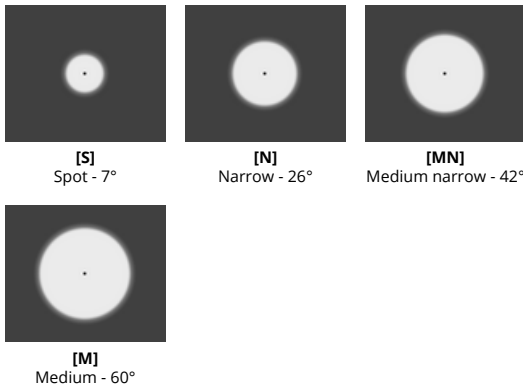
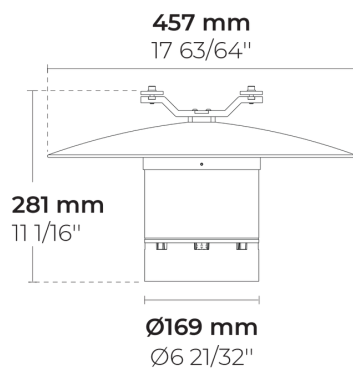


PUNTO CA

LC8018.694-EN

CE UKCA IK08 IP65

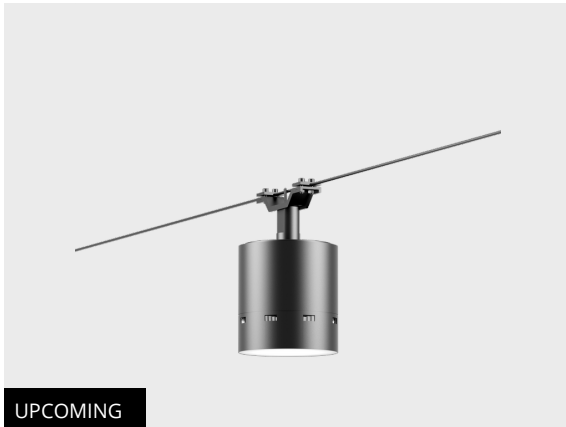

Light distribution	[S] 7°, [N] 26°, [MN] 42°, [M] 60°
Luminaire luminous flux	1767 - 2926 lm
Rated input power	27 W
CCT	2700K, 3000K, 4000K
CRI	Ra80
Control	On/Off, DALI
Product colours	
Luminaire efficacy	68 - 108 lm/W
Colour deviation	3 SDCM
Lifetime L90B50 (hour)	>72, 600
Housing	Marine grade aluminum housing
Driver	Integral LED driver
Input voltage	220-240V 50/60Hz

Extras

Consult the factory	120-277V 50/60Hz
Luminaire body options	Double powder coating

Technical details

Certificates	CE, UKCA
Mounting	Ceiling mountable
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Insulation class	Class I
Weight	4.5 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver surge protection	10/6 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.2 m of flexible cable

HEPER HQ - HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2,
Malıköy, Temelli, Sincan, 06909
Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 2372 568 7570
infoEU@hepergroup.com
www.heperlighting.com/de

We reserve the right to change specifications without prior written notice. Edition: 10.08.2026. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name				Type		Quantity	
Date		Note					

LC8018.694-EN-**-EN-C1-**

Light distribution	Rated input power	Colour temperature	Control	Product colours
[S] Spot - 7° [N] Narrow - 26° [MN] Medium narrow - 42° [M] Medium - 60°	[700] 27 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[HM1] Black [HM2] Dark grey [HM3] Anthracite grey [HM4] Light grey [HM5] White [HM6] Bronze [CC] Custom colour (Please specify RAL code)
Extras				
Consult the factory				
[UNI] 120-277V 50/60Hz				
Luminaire body options				
[DPC] Double powder coating				

Variant code	Light distribution	Luminaire luminous flux	Rated input power	CCT	CRI	Control	BUG rating
LC8018.694-EN-S-700-827	[S] Spot - 7°	2579 lm	27 W	2700K	Ra80	On/Off, DALI	
LC8018.694-EN-N-700-827	[N] Narrow - 26°	2456 lm	27 W	2700K	Ra80	On/Off, DALI	
LC8018.694-EN-MN-700-827	[MN] Medium narrow - 42°	1980 lm	27 W	2700K	Ra80	On/Off, DALI	
LC8018.694-EN-M-700-827	[M] Medium - 60°	1767 lm	27 W	2700K	Ra80	On/Off, DALI	
LC8018.694-EN-S-700-830	[S] Spot - 7°	2608 lm	27 W	3000K	Ra80	On/Off, DALI	
LC8018.694-EN-N-700-830	[N] Narrow - 26°	2484 lm	27 W	3000K	Ra80	On/Off, DALI	
LC8018.694-EN-MN-700-830	[MN] Medium narrow - 42°	2001 lm	27 W	3000K	Ra80	On/Off, DALI	
LC8018.694-EN-M-700-830	[M] Medium - 60°	1788 lm	27 W	3000K	Ra80	On/Off, DALI	
LC8018.694-EN-S-700-840	[S] Spot - 7°	2926 lm	27 W	4000K	Ra80	On/Off, DALI	
LC8018.694-EN-N-700-840	[N] Narrow - 26°	2787 lm	27 W	4000K	Ra80	On/Off, DALI	
LC8018.694-EN-MN-700-840	[MN] Medium narrow - 42°	2245 lm	27 W	4000K	Ra80	On/Off, DALI	
LC8018.694-EN-M-700-840	[M] Medium - 60°	2006 lm	27 W	4000K	Ra80	On/Off, DALI	