


VERTEX C 1 Module

LD6064.591-EN



IK07 IP66

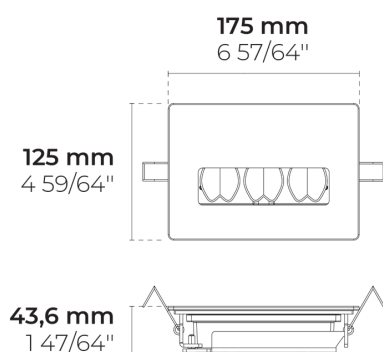

[SLF]
Special linear,
Forward throw -
144x41°

Light distribution
Luminaire luminous flux
Rated input power
CCT
CRI
Product colours
Luminaire efficacy
Colour deviation
BUG rating
Lifetime L90B50 (hour)
Housing
Driver
Input voltage

[SLF] 144x41°
423 - 450 lm
8 W
2700K, 3000K, 4000K
Ra80

52 - 56 lm/W
3 SDCM
B0-U1-G0
>60, 000
Marine grade aluminum housing
Remote LED driver (Multiple Products)
18VDC (Max) 350mA

Technical details

Certificates CE, UKCA
Mounting Ceiling mountable
Fasteners Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket Liquid silicone
Lens / Reflector High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor Tempered safety glass
Impact protection IK07
Ingress protection IP66
Insulation class Class III
Weight 0.72 kg
LED module Multi-chip high power LEDs on metal-core PCB
Through wiring Single cable entry
Operating temperature -25...50°C
Cable 0.2 m of flexible cable

HEPER HQ - HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2,
Malıköy, Temelli, Sincan, 06909
Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 2372 568 7570
infoEU@hepergroup.com
www.heperlighting.com/de


We reserve the right to change specifications without prior written notice. Edition: 10.07.2026. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name		Type		Quantity	
Date		Note			
LD6064.591-EN-____-____-____-____-CC-18V-350-C3-____					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SLF] Special linear, Forward throw - 144x41°	[350] 8 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80		[HM1] Black 
Accessories (To be ordered separately)				
Mounting accessories				
[007502867] DALI & On/Off driver within an IP67 box for VERTEX C				

Accessories (To be ordered separately)

Mounting accessories



**DALI & On/Off
driver within an
IP67 box for
VERTEX C**

007502867

Variant code	Light distribution	Luminaire luminous flux	Rated input power	CCT	CRI	Control	BUG rating
LD6064.591-EN-SLFB-350-827	[SLF] Special linear, Forward throw - 144x41°	423 lm	8 W	2700K	Ra80		B0-U1-G0
LD6064.591-EN-SLFB-350-830	[SLF] Special linear, Forward throw - 144x41°	430 lm	8 W	3000K	Ra80		B0-U1-G0
LD6064.591-EN-SLFB-350-840	[SLF] Special linear, Forward throw - 144x41°	450 lm	8 W	4000K	Ra80		B0-U1-G0