



PUNTO

LF8018.694-EN

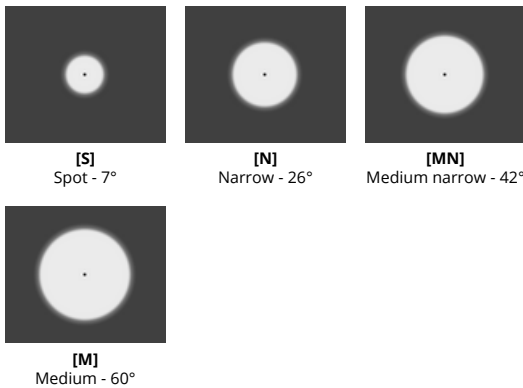

IK08 IP65

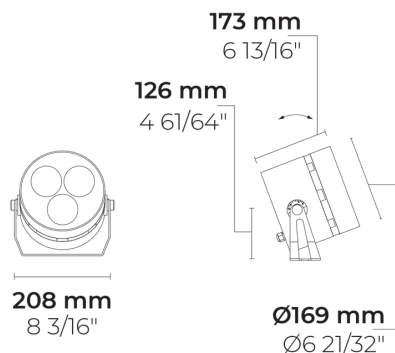

Light distribution

Luminaire luminous flux

Rated input power

CCT

CRI

Control

Product colours

Luminaire efficacy

Colour deviation

Lifetime L90B50 (hour)

Housing

Driver

Input voltage

[S] 7°, [N] 26°, [MN] 42°, [M] 60°

1767 - 2787 lm

27 W

2700K, 3000K, 4000K

Ra80

On/Off, DALI



68 - 107 lm/W

3 SDCM

>72, 600

Marine grade aluminum housing

Integral LED driver

220-240V 50/60Hz

Extras

Consult the factory

Luminaire body options

120-277V 50/60Hz

Double powder coating

Technical details

Certificates

Mounting

Tilt angle

Finishing

Fasteners

Gasket

Lens / Reflector

Glass / Diffuser

Impact protection

Ingress protection

Insulation class

Wind catching area (EPA)

Weight

LED module

Driver surge protection

Power factor

Through wiring

Operating temperature

Cable

CE, UKCA

Surface mountable via a bracket (standard) or spike (optional)

+60°/-30°

Chromate conversion pretreatment followed by electrostatic powder coating

Stainless steel (AISI 304 / EN 1.4301 grade)

Silicone rubber

High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]

Tempered safety glass

IK08

IP65

Class I

0.03 m²

4.14 kg

Multi-chip high power LEDs on metal-core PCB

10/6 kV

> 0.90

Single cable entry

-40...50°C

0.4 m of flexible cable

HEPER HQ - HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2,
Malıköy, Temelli, Sincan, 06909
Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 2372 568 7570
infoEU@hepergroup.com
www.heperlighting.com/de

We reserve the right to change specifications without prior written notice. Edition: 17.04.2025. For current version visit heperlighting.com. All flux (±7% tolerance) and power values (±10% tolerance) are derived following appropriate IES, CIE, and applicable standards.


Project name				Type		Quantity	
Date		Note					

LF8018.694-EN-__-__-__-__-EN-C1-__-__-__

Light distribution	Rated input power	Colour temperature	Control	Product colours
[S] Spot - 7° [N] Narrow - 26° [MN] Medium narrow - 42° [M] Medium - 60°	[700] 27 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[HM1]  Black [HM2]  Dark grey [HM3]  Anthracite grey [HM4]  Light grey [HM5]  White [HM6]  Bronze [CC]  Custom colour (Please specify RAL code)
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Mounting accessories			
[UNI] 120-277V 50/60Hz	[160405040] Stake			
Luminaire body options	Optical accessories			
[DPC] Double powder coating	[007502216] Snoot for PUNTO			

Accessories (To be ordered separately)


Mounting accessories



Stake

160405040

Optical accessories



Snoot for PUNTO

007502216

Variant code	Light distribution	Luminaire luminous flux	Rated input power	CCT	CRI	Control	BUG rating
LF8018.694-EN-S-700-827	[S] Spot - 7°	2456 lm	27 W	2700K	Ra80	On/Off, DALI	
LF8018.694-EN-N-700-827	[N] Narrow - 26°	2456 lm	27 W	2700K	Ra80	On/Off, DALI	
LF8018.694-EN-MN-700-827	[MN] Medium narrow - 42°	1980 lm	27 W	2700K	Ra80	On/Off, DALI	
LF8018.694-EN-M-700-827	[M] Medium - 60°	1767 lm	27 W	2700K	Ra80	On/Off, DALI	
LF8018.694-EN-S-700-830	[S] Spot - 7°	2484 lm	27 W	3000K	Ra80	On/Off, DALI	
LF8018.694-EN-N-700-830	[N] Narrow - 26°	2484 lm	27 W	3000K	Ra80	On/Off, DALI	
LF8018.694-EN-MN-700-830	[MN] Medium narrow - 42°	2001 lm	27 W	3000K	Ra80	On/Off, DALI	
LF8018.694-EN-M-700-830	[M] Medium - 60°	1788 lm	27 W	3000K	Ra80	On/Off, DALI	
LF8018.694-EN-S-700-840	[S] Spot - 7°	2787 lm	27 W	4000K	Ra80	On/Off, DALI	
LF8018.694-EN-N-700-840	[N] Narrow - 26°	2787 lm	27 W	4000K	Ra80	On/Off, DALI	
LF8018.694-EN-MN-700-840	[MN] Medium narrow - 42°	2245 lm	27 W	4000K	Ra80	On/Off, DALI	
LF8018.694-EN-M-700-840	[M] Medium - 60°	2006 lm	27 W	4000K	Ra80	On/Off, DALI	