
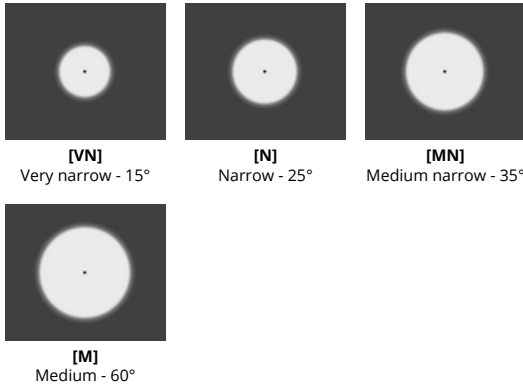


SPARK L

LF8040.530-EN

CE UKCA IK07 IP66

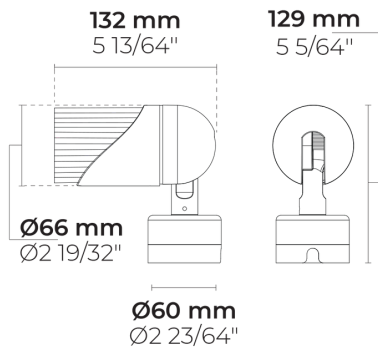

Light distribution

Luminaire luminous flux

Rated input power

CCT

CRI

Product colours

Luminaire efficacy

Colour deviation

Housing

Driver

Input voltage

[VN] 15°, [N] 25°, [MN] 35°, [M] 60°

1077 - 1343 lm

15 W

2700K, 3000K, 4000K

Ra90



72 - 90 lm/W

3 SDCM

Marine grade aluminum housing

Remote LED driver

36VDC (Max) 350mA

Extras

Light output

Mounting options

Luminaire body options

Honeycomb

Pole Mount For SPARK L, Wall Mount for Spark L

Double powder coating

Technical details

Certificates

Mounting

Tilt angle

Rotation angle

Finishing

Fasteners

Gasket

Lens / Reflector

Glass / Diffuser

Impact protection

Ingress protection

Insulation class

Weight

LED module

Through wiring

Operating temperature

Cable

CE, UKCA

Surface mountable via a stationary base (standard), spike and wall-mountable via a bracket (both optional)

+90°/0°

0°/+355°

Knurled surface in black anodized aluminum and body in chromate conversion pretreatment followed by electrostatic powder coating

Stainless steel (AISI 316L)

EPDM gasket (Shore A 25-30)

PMMA lens with high optical efficiency

Tempered safety glass

IK07

IP66

Class III

0.82 kg

High efficacy COB LED with long time reliability

Single cable entry

-40...50°C

0.2 m of flexible cable

HEPER HQ - HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2,
Malıköy, Temelli, Sincan, 06909
Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 2372 568 7570
infoEU@hepergroup.com
www.heperlighting.com/de


We reserve the right to change specifications without prior written notice. Edition: 30.07.2025. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name		Type		Quantity	
Date		Note			
LF8040.530-EN-____-____-____-CC-36V-350-C3-____-____-____-____					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[VN] Very narrow - 15° [N] Narrow - 25° [MN] Medium narrow - 35° [M] Medium - 60°	[350] 15 W	[927] 2700 K CRI 90 [930] 3000 K CRI 90 [940] 4000 K CRI 90		[HM1]  Black [HM2]  Dark grey [HM3]  Anthracite grey [HM4]  Light grey [HM5]  White [HM6]  Bronze [CC]  Custom colour (Please specify RAL code)
Extras	Accessories (<i>To be ordered separately</i>)			
Light output	Mounting accessories			
[HNY] Honeycomb	[007502945] DALI & On/Off driver within an IP67 box for SPARK L [160405040] Stake [180901194] Tree belt for SPARK			
Mounting options				
[PM L] Pole Mount For SPARK L [WM L] Wall Mount for Spark L				
Luminaire body options	Optical accessories			
[DPC] Double powder coating	[400694903] Snoot for SPARK L [400140001] Visor for SPARK L			

Accessories (To be ordered separately)


Mounting accessories



**DALI & On/Off
driver within an
IP67 box for
SPARK L**

007502945

Mounting accessories



Stake

160405040


Optical accessories



Snoot for SPARK L

400694903


Optical accessories



Visor for SPARK L

400140001

Mounting accessories



**Tree belt for
SPARK**

180901194

Variant code	Light distribution	Luminaire luminous flux	Rated input power	CCT	CRI	Control	BUG rating
LF8040.530-EN-VN-350-927	[VN] Very narrow - 15°	1095 lm	15 W	2700K	Ra90		
LF8040.530-EN-N-350-927	[N] Narrow - 25°	1136 lm	15 W	2700K	Ra90		
LF8040.530-EN-MN-350-927	[MN] Medium narrow - 35°	1077 lm	15 W	2700K	Ra90		
LF8040.530-EN-M-350-927	[M] Medium - 60°	1138 lm	15 W	2700K	Ra90		
LF8040.530-EN-VN-350-930	[VN] Very narrow - 15°	1128 lm	15 W	3000K	Ra90		
LF8040.530-EN-N-350-930	[N] Narrow - 25°	1171 lm	15 W	3000K	Ra90		
LF8040.530-EN-MN-350-930	[MN] Medium narrow - 35°	1110 lm	15 W	3000K	Ra90		
LF8040.530-EN-M-350-930	[M] Medium - 60°	1173 lm	15 W	3000K	Ra90		
LF8040.530-EN-VN-350-940	[VN] Very narrow - 15°	1282 lm	15 W	4000K	Ra90		
LF8040.530-EN-N-350-940	[N] Narrow - 25°	1343 lm	15 W	4000K	Ra90		
LF8040.530-EN-MN-350-940	[MN] Medium narrow - 35°	1324 lm	15 W	4000K	Ra90		
LF8040.530-EN-M-350-940	[M] Medium - 60°	1200 lm	15 W	4000K	Ra90		