


URBAN UNITS Top Module

LP4054.538-EN



IK08 IP65

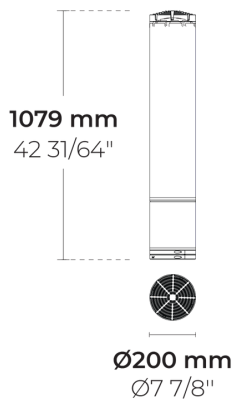

[SYM]
Symmetric - 108.4

Light distribution	[SYM] 108.4
Luminaire luminous flux	4631 - 7074 lm
Rated input power	48 - 72 W
CCT	2700K, 3000K
CRI	Ra80
Control	On/Off, DALI, AutoDIM
Product colours	
Height	3m, 4m, 5m
Luminaire efficacy	98 lm/W
Colour deviation	3 SDCM
Lifetime L90B10 (hour)	>102 000
Housing	Marine grade aluminum housing
Driver	Integral LED driver
Input voltage	220-240V 50/60Hz
Notes	Anchorage should be chosen according to the base pole height and not the total height.

Extras

External surge protection	10 kV
Light output	Constant light output
Consult the factory	120-277V 50/60Hz
Luminaire body options	Double powder coating

Technical details

Certificates	CE, UKCA
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Insulation class	Class I
Weight	11 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable

HEPER HQ - HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2,
Malıköy, Temelli, Sincan, 06909
Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 2372 568 7570
infoEU@hepergroup.com
www.heperlighting.com/de

We reserve the right to change specifications without prior written notice. Edition: 14.01.2026. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name				Type		Quantity	
Date		Note					

LP4054.538-EN-**-EN-C1-**

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM] Symmetric - 108.4	[700] 48 W [1050] 72 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80	[ONOFF] On/Off [DALI] DALI [AUTO] AutoDIM	[HM1] Black [HM2] Dark grey [HM3] Anthracite grey [HM4] Light grey [HM5] White [HM6] Bronze [CC] Custom colour (Please specify RAL code)
Height	Extras			
[H03] 3m	External surge protection			
[H04] 4m	[SP10] 10 kV			
[H05] 5m	Light output			
	[CLO] Constant light output			
	Consult the factory			
	[UNI] 120-277V 50/60Hz			
	Luminaire body options			
	[DPC] Double powder coating			

Poles (Included)

Product specific poles with flange plate



Product code	Height	Diameter / Dimensions	Spigot diameter
PAFC.URB-EN-H03	3m	Ø200mm	
PAFC.URB-EN-H04	4m	Ø200mm	
PAFC.URB-EN-H05	5m	Ø200mm	

Variant code	Light distribution	Luminaire luminous flux	Rated input power	CCT	CRI	Control	BUG rating
LP4054.538-EN-SYM-700-827	[SYM] Symmetric - 108.4	4896 lm	48 W	2700 K	Ra80	On/Off, DALI, AutoDIM	
LP4054.538-EN-SYM-700-830	[SYM] Symmetric - 108.4	4631 lm	48 W	3000 K	Ra80	On/Off, DALI, AutoDIM	
LP4054.538-EN-SYM-1050-827	[SYM] Symmetric - 108.4	7074 lm	72 W	2700 K	Ra80	On/Off, DALI, AutoDIM	
LP4054.538-EN-SYM-1050-830	[SYM] Symmetric - 108.4	6692 lm	72 W	3000 K	Ra80	On/Off, DALI, AutoDIM	