



# ZEROX Hybrid

LR9005.695-EN

CE UK CA IK10 IP67



**heper**

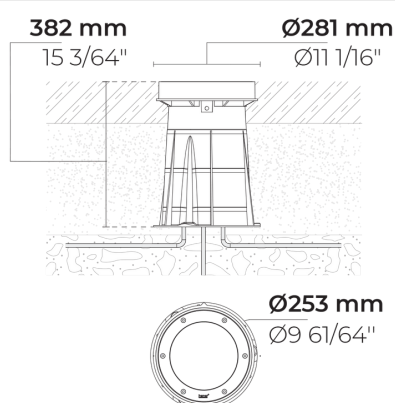

|                         |                         |
|-------------------------|-------------------------|
| Light distribution      | [S] 7°, [N] 26°         |
| Luminaire luminous flux | 1914 - 3215 lm          |
| Rated input power       | 18 - 28 W               |
| CCT                     | 2700K, 3000K, 4000K     |
| CRI                     | Ra70, Ra80              |
| Control                 | On/Off, DALI            |
| Product colours         |                         |
| Luminaire efficacy      | 92 - 117 lm/W           |
| Colour deviation        | 3 SDCM, 4 SDCM          |
| Lifetime L90B50 (hour)  | >72, 600                |
| Housing                 | Stainless steel housing |
| Driver                  | Integral LED driver     |
| Input voltage           | 220-240V 50/60Hz        |

## Extras

|                     |                  |
|---------------------|------------------|
| Consult the factory | 120-277V 50/60Hz |
|---------------------|------------------|

## Technical details

|                         |                                              |
|-------------------------|----------------------------------------------|
| Certificates            | CE, UKCA                                     |
| Mounting                | Ground recessed mountable                    |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket                  | Silicone                                     |
| Lens / Reflector        | High reflectance aluminium coating           |
| Glass / Diffuser        | Tempered safety glass                        |
| Impact protection       | IK10                                         |
| Ingress protection      | IP67                                         |
| Insulation class        | Class I                                      |
| Weight                  | 6.85 kg                                      |
| LED module              | Multi-chip high power LEDs on metal-core PCB |
| Driver surge protection | 10/6 kV                                      |
| Power factor            | > 0.95                                       |
| Through wiring          | Single cable entry                           |
| Operating temperature   | -40...50°C                                   |
| Cable                   | 0.3 m of rubber-sheathed cable               |

HEPER HQ - HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2,  
Malıköy, Temelli, Sincan, 06909  
Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 2372 568 7570  
infoEU@hepergroup.com  
www.heperlighting.com/de

We reserve the right to change specifications without prior written notice. Edition: 14.01.2026. For current version visit [heperlighting.com](http://heperlighting.com). All flux ( $\pm 7\%$  tolerance) and power values ( $\pm 10\%$  tolerance) are derived following appropriate IES, CIE, and applicable standards.

|              |  |      |  |      |  |          |  |
|--------------|--|------|--|------|--|----------|--|
| Project name |  |      |  | Type |  | Quantity |  |
| Date         |  | Note |  |      |  |          |  |

**LR9005.695-EN-****-EN-C1-**

| Light distribution                                           | Rated input power                                   | Colour temperature                                                                                                                          | Control                                                  | Product colours                                 |
|--------------------------------------------------------------|-----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|-------------------------------------------------|
| <div>[S]<br/>Spot - 7°</div> <div>[N]<br/>Narrow - 26°</div> | <div>[350]<br/>18 W</div> <div>[500]<br/>28 W</div> | <div>[827]<br/>2700 K CRI 80</div> <div>[830]<br/>3000 K CRI 80</div> <div>[740]<br/>4000 K CRI 70</div> <div>[840]<br/>4000 K CRI 80</div> | <div>[ONOFF]<br/>On/Off</div> <div>[DALI]<br/>DALI</div> | <div>[SS]<br/>Stainless steel</div> <div></div> |
| Extras                                                       | Accessories ( <i>To be ordered separately</i> )     |                                                                                                                                             |                                                          |                                                 |
| Consult the factory                                          | Mounting accessories                                |                                                                                                                                             |                                                          |                                                 |
| [UNI]<br>120-277V 50/60Hz                                    | [160404012]<br>Case removing vacuum                 |                                                                                                                                             |                                                          |                                                 |
|                                                              | [141407400]<br>Connector set - 5-pole               |                                                                                                                                             |                                                          |                                                 |
|                                                              | [141901135]<br>Junction Box                         |                                                                                                                                             |                                                          |                                                 |
|                                                              | [007501028]<br>Plastic case for ZEROX               |                                                                                                                                             |                                                          |                                                 |

## Accessories (To be ordered separately)

---


Mounting accessories



**Case removing  
vacuum**

160404012


Mounting accessories



**Connector set - 5-  
pole**

141407400


Mounting accessories



**Junction Box**

141901135

Mounting accessories



**Plastic case for  
ZEROX**

007501028

| Variant code            | Light distribution | Luminaire<br>luminous<br>flux | Rated<br>input<br>power | CCT   | CRI  | Control      | BUG<br>rating |
|-------------------------|--------------------|-------------------------------|-------------------------|-------|------|--------------|---------------|
| LR9005.695-EN-S-350-827 | [S] Spot - 7°      | 1914 lm                       | 18 W                    | 2700K | Ra80 | On/Off, DALI |               |
| LR9005.695-EN-N-350-827 | [N] Narrow - 26°   | 1914 lm                       | 18 W                    | 2700K | Ra80 | On/Off, DALI |               |
| LR9005.695-EN-S-350-830 | [S] Spot - 7°      | 1947 lm                       | 18 W                    | 3000K | Ra80 | On/Off, DALI |               |
| LR9005.695-EN-N-350-830 | [N] Narrow - 26°   | 1947 lm                       | 18 W                    | 3000K | Ra80 | On/Off, DALI |               |
| LR9005.695-EN-S-350-740 | [S] Spot - 7°      | 2353 lm                       | 18 W                    | 4000K | Ra70 | On/Off, DALI |               |
| LR9005.695-EN-N-350-740 | [N] Narrow - 26°   | 2353 lm                       | 18 W                    | 4000K | Ra70 | On/Off, DALI |               |
| LR9005.695-EN-S-350-840 | [S] Spot - 7°      | 2154 lm                       | 18 W                    | 4000K | Ra80 | On/Off, DALI |               |
| LR9005.695-EN-N-350-840 | [N] Narrow - 26°   | 2154 lm                       | 18 W                    | 4000K | Ra80 | On/Off, DALI |               |
| LR9005.695-EN-S-500-827 | [S] Spot - 7°      | 2585 lm                       | 28 W                    | 2700K | Ra80 | On/Off, DALI |               |
| LR9005.695-EN-N-500-827 | [N] Narrow - 26°   | 2585 lm                       | 28 W                    | 2700K | Ra80 | On/Off, DALI |               |
| LR9005.695-EN-S-500-830 | [S] Spot - 7°      | 2622 lm                       | 28 W                    | 3000K | Ra80 | On/Off, DALI |               |
| LR9005.695-EN-N-500-830 | [N] Narrow - 26°   | 2622 lm                       | 28 W                    | 3000K | Ra80 | On/Off, DALI |               |
| LR9005.695-EN-S-500-740 | [S] Spot - 7°      | 3215 lm                       | 28 W                    | 4000K | Ra70 | On/Off, DALI |               |
| LR9005.695-EN-N-500-740 | [N] Narrow - 26°   | 3215 lm                       | 28 W                    | 4000K | Ra70 | On/Off, DALI |               |
| LR9005.695-EN-S-500-840 | [S] Spot - 7°      | 2920 lm                       | 28 W                    | 4000K | Ra80 | On/Off, DALI |               |
| LR9005.695-EN-N-500-840 | [N] Narrow - 26°   | 2920 lm                       | 28 W                    | 4000K | Ra80 | On/Off, DALI |               |