



ZEROX M Hybrid

LR9017.690-EN

CE UKCA IK10 IP67

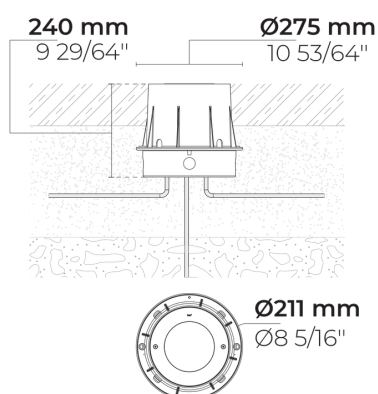

Light distribution	[S] 7°, [N] 26°
Luminaire luminous flux	956 - 2038 lm
Rated input power	10 - 18 W
CCT	2700K, 3000K, 4000K
CRI	Ra70, Ra80
Control	On/Off, DALI
Product colours	
Luminaire efficacy	83 - 123 lm/W
Colour deviation	3 SDCM, 4 SDCM
Lifetime L90B50 (hour)	>72, 600
Housing	Stainless steel housing (AISI 316L / EN 1.4404 grade)
Driver	Integral LED driver
Input voltage	220-240V 50/60Hz

Extras

Consult the factory	120-277V 50/60Hz
---------------------	------------------

Technical details

Certificates	CE, UKCA
Mounting	Ground recessed mountable
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffuser	Tempered safety glass
Impact protection	IK10
Ingress protection	IP67
Insulation class	Class I
Weight	4.06 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-30...50°C
Cable	0.3 m of rubber-sheathed cable

HEPER HQ - HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2,
Malıköy, Temelli, Sincan, 06909
Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 2372 568 7570
infoEU@hepergroup.com
www.heperlighting.com/de

We reserve the right to change specifications without prior written notice. Edition: 04.10.2024. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name				Type		Quantity	
Date		Note					

LR9017.690-EN-**-EN-C1-**


Light distribution	Rated input power	Colour temperature	Control	Product colours
[S] Spot - 7° [N] Narrow - 26°	[350] 10 W [500] 13 W [700] 18 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[SS] Stainless steel
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Mounting accessories			
[UNI] 120-277V 50/60Hz	[160404012] Case removing vacuum [141407400] Connector set - 5-pole [141901135] Junction Box [007502092] Plastic case for ZEROX M			

Accessories (To be ordered separately)


Mounting accessories Mounting accessories Mounting accessories



Case removing vacuum
160404012



Connector set - 5-pole
141407400



Junction Box
141901135

Mounting accessories



Plastic case for ZEROX M
007502092

Variant code	Light distribution	Luminaire luminous flux	Rated input power	CCT	CRI	Control	BUG rating
LR9017.690-EN-S-350-827	[S] Spot - 7°	1077 lm	10 W	2700K	Ra80	On/Off, DALI	
LR9017.690-EN-N-350-827	[N] Narrow - 26°	956 lm	10 W	2700K	Ra80	On/Off, DALI	
LR9017.690-EN-S-350-830	[S] Spot - 7°	973 lm	10 W	3000K	Ra80	On/Off, DALI	
LR9017.690-EN-N-350-830	[N] Narrow - 26°	973 lm	10 W	3000K	Ra80	On/Off, DALI	
LR9017.690-EN-S-350-740	[S] Spot - 7°	1176 lm	10 W	4000K	Ra70	On/Off, DALI	
LR9017.690-EN-N-350-740	[N] Narrow - 26°	1176 lm	10 W	4000K	Ra70	On/Off, DALI	
LR9017.690-EN-S-350-840	[S] Spot - 7°	1077 lm	10 W	4000K	Ra80	On/Off, DALI	
LR9017.690-EN-N-350-840	[N] Narrow - 26°	1077 lm	10 W	4000K	Ra80	On/Off, DALI	
LR9017.690-EN-S-500-827	[S] Spot - 7°	1292 lm	13 W	2700K	Ra80	On/Off, DALI	
LR9017.690-EN-N-500-827	[N] Narrow - 26°	1292 lm	13 W	2700K	Ra80	On/Off, DALI	
LR9017.690-EN-S-500-830	[S] Spot - 7°	1309 lm	13 W	3000K	Ra80	On/Off, DALI	
LR9017.690-EN-N-500-830	[N] Narrow - 26°	1309 lm	13 W	3000K	Ra80	On/Off, DALI	
LR9017.690-EN-S-500-740	[S] Spot - 7°	1607 lm	13 W	4000K	Ra70	On/Off, DALI	
LR9017.690-EN-N-500-740	[N] Narrow - 26°	1607 lm	13 W	4000K	Ra70	On/Off, DALI	
LR9017.690-EN-S-500-840	[S] Spot - 7°	1458 lm	13 W	4000K	Ra80	On/Off, DALI	
LR9017.690-EN-N-500-840	[N] Narrow - 26°	1458 lm	13 W	4000K	Ra80	On/Off, DALI	
LR9017.690-EN-S-700-827	[S] Spot - 7°	1678 lm	18 W	2700K	Ra80	On/Off, DALI	
LR9017.690-EN-N-700-827	[N] Narrow - 26°	1678 lm	18 W	2700K	Ra80	On/Off, DALI	
LR9017.690-EN-S-700-830	[S] Spot - 7°	1888 lm	18 W	3000K	Ra80	On/Off, DALI	
LR9017.690-EN-N-700-830	[N] Narrow - 26°	1698 lm	18 W	3000K	Ra80	On/Off, DALI	
LR9017.690-EN-S-700-740	[S] Spot - 7°	2038 lm	18 W	4000K	Ra70	On/Off, DALI	
LR9017.690-EN-N-700-740	[N] Narrow - 26°	2038 lm	18 W	4000K	Ra70	On/Off, DALI	
LR9017.690-EN-S-700-840	[S] Spot - 7°	1906 lm	18 W	4000K	Ra80	On/Off, DALI	
LR9017.690-EN-N-700-840	[N] Narrow - 26°	1906 lm	18 W	4000K	Ra80	On/Off, DALI	