

DOGO 8 LED


LW6048.910-EN



IK08 IP66



NEW

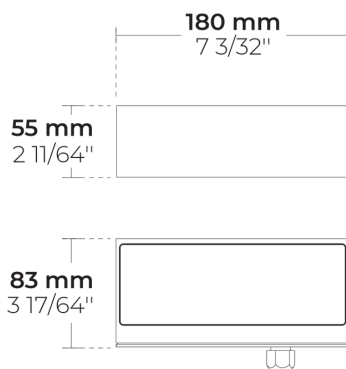

[T3-FG]

Type III, Asymmetric,
Side throw - Frosted
Glass - 132x64°

Light distribution
Luminaire luminous flux
Rated input power
CCT
CRI
Control
Product colours
Luminaire efficacy
Colour deviation
Lifetime L90B10 (hour)
Housing
Driver
Input voltage

[T3-FG] 132x64°
642 - 1434 lm
10 - 20 W
2700K, 3000K, 4000K
Ra80
On/Off, DALI



59 - 78 lm/W
3 SDCM
>102, 000

Marine grade aluminum housing
Integral LED driver
220-240V 50/60Hz

Notes

For specifications with Turtle Friendly options and photometry files, please contact the factory.

Extras

Light output

Turtle Friendly

Mounting options

Extra surface mounting adaptor for a flat wall

Consult the factory

120-277V 50/60Hz

Luminaire body options

Double powder coating

Technical details

Certificates

CE, UKCA, Turtle Friendly

Mounting

Surface or wall mountable

Finishing

Chromate conversion pretreatment followed by electrostatic powder coating

Fasteners

Stainless steel (AISI 304 / EN 1.4301 grade)

Gasket

Silicone

Lens / Reflector

PMMA lens with high optical efficiency

Glass / Diffusor

Tempered safety glass

Impact protection

IK08

Ingress protection

IP66

Insulation class

Class I

Weight

1.1 kg

Driver surge protection

1/1 kV

Power factor

> 0.90

Through wiring

Single cable entry

Operating temperature

-40...50°C

Cable

0.2 m of flexible cable

Packing box dimensions

11*20*7 cm

HEPER HQ - HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2,
Malıköy, Temelli, Sincan, 06909
Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 2372 568 7570
infoEU@hepergroup.com
www.heperlighting.com/de

We reserve the right to change specifications without prior written notice. Edition: 06.08.2026. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name		Type		Quantity	
Date		Note			
LW6048.910-EN-____-____-____-____-EN-C1-____-____-____-____					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[T3-FG] Type III, Asymmetric, Side throw - Frosted Glass - 132x64°	[350] 10 W [700] 20 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[HM1]  Black [HM2]  Dark grey [HM3]  Anthracite grey [HM4]  Light grey [HM5]  White [HM6]  Bronze [CC]  Custom colour (Please specify RAL code)
Extras				
Light output				
[TF] Turtle Friendly				
Mounting options				
[ESMA] Extra surface mounting adaptor for a flat wall				
Consult the factory				
[UNI] 120-277V 50/60Hz				
Luminaire body options				
[DPC] Double powder coating				

Variant code	Light distribution	Luminaire luminous flux	Rated input power	CCT	CRI	Control	BUG rating
LW6048.910-EN-T3FG-350-827	[T3-FG] Type III, Asymmetric, Side throw - Frosted Glass - 132x64°	642 lm	10 W	2700 K	Ra80	On/Off, DALI	
LW6048.910-EN-T3FG-350-830	[T3-FG] Type III, Asymmetric, Side throw - Frosted Glass - 132x64°	733 lm	10 W	3000 K	Ra80	On/Off, DALI	
LW6048.910-EN-T3FG-350-840	[T3-FG] Type III, Asymmetric, Side throw - Frosted Glass - 132x64°	779 lm	10 W	4000 K	Ra80	On/Off, DALI	
LW6048.910-EN-T3FG-700-827	[T3-FG] Type III, Asymmetric, Side throw - Frosted Glass - 132x64°	1181 lm	20 W	2700 K	Ra80	On/Off, DALI	
LW6048.910-EN-T3FG-700-830	[T3-FG] Type III, Asymmetric, Side throw - Frosted Glass - 132x64°	1350 lm	20 W	3000 K	Ra80	On/Off, DALI	
LW6048.910-EN-T3FG-700-840	[T3-FG] Type III, Asymmetric, Side throw - Frosted Glass - 132x64°	1434 lm	20 W	4000 K	Ra80	On/Off, DALI	