

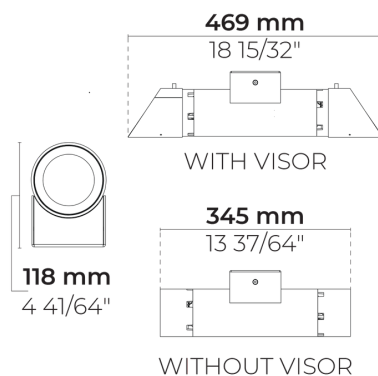


PUNTO S W Duo

LW7036.519-EN

CE UKCA IK08 IP65

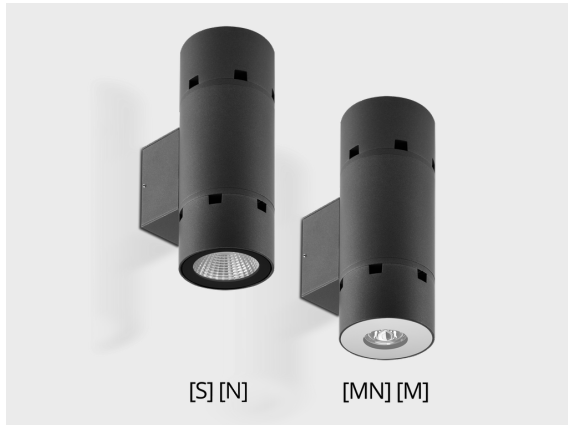

Light distribution	[S-S] 7°, [N-N] 26°, [MN-MN] 42°, [M-M] 60°
Luminaire luminous flux	1204 - 2038 lm
Rated input power	18 W
CCT	2700K, 3000K, 4000K
CRI	Ra70, Ra80
Control	On/Off, DALI
Product colours	
Luminaire efficacy	60 - 113 lm/W
Colour deviation	3 SDCM, 4 SDCM
BUG rating	B1-U0-G0, B1-U1-G0
Lifetime L90B50 (hour)	>72, 600
Housing	Marine grade aluminum housing
Driver	Integral LED driver
Input voltage	220-240V 50/60Hz

Please consult factory for combinations of different light distributions. The photometry download contains two separate files, each representing one side of the lighting fixture. To accurately obtain the lighting characteristics for a double-headed layout, both files must be imported into the design software.

Notes

Extras

Consult the factory	120-277V 50/60Hz
----------------------------	------------------

Technical details

Certificates	CE, UKCA
Mounting	Wall mountable
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Insulation class	Class I
Weight	1.51 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver surge protection	2/2 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.2 m of flexible cable

HEPER HQ - HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2,
Malıköy, Temelli, Sincan, 06909
Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 2372 568 7570
infoEU@hepergroup.com
www.heperlighting.com/de

We reserve the right to change specifications without prior written notice. Edition: 14.01.2026. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.


Project name				Type		Quantity	
Date		Note					

LW7036.519-EN-__-__-__-__-EN-C1-__-__

Light distribution	Rated input power	Colour temperature	Control	Product colours
[S-S] Spot (Up & Down) - 7° [N-N] Narrow (Up & Down) - 26° [MN-MN] Medium Narrow (Up & Down) - 42° [M-M] Medium (Up & Down) - 60°	[700] 18 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[HM1]  Black [HM2]  Dark grey [HM3]  Anthracite grey [HM4]  Light grey [HM5]  White [HM6]  Bronze [CC]  Custom colour (Please specify RAL code)
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Optical accessories			
[UNI] 120-277V 50/60Hz	[007502282] Visor for PUNTO S			

Accessories (To be ordered separately)

Optical accessories



Visor for PUNTO S

007502282

Variant code	Light distribution	Luminaire luminous flux	Rated input power	CCT	CRI	Control	BUG rating
LW7036.519-EN-S-S-700-827	[S-S] Spot (Up & Down) - 7°	1678 lm	18 W	2700K	Ra80	On/Off, DALI	B1-U0-G0
LW7036.519-EN-N-N-700-827	[N-N] Narrow (Up & Down) - 26°	1678 lm	18 W	2700K	Ra80	On/Off, DALI	B1-U0-G0
LW7036.519-EN-MN-MN-700-827	[MN-MN] Medium Narrow (Up & Down) - 42°	1350 lm	18 W	2700K	Ra80	On/Off, DALI	B1-U0-G0
LW7036.519-EN-M-M-700-827	[M-M] Medium (Up & Down) - 60°	1204 lm	18 W	2700K	Ra80	On/Off, DALI	B1-U0-G0
LW7036.519-EN-S-S-700-830	[S-S] Spot (Up & Down) - 7°	1888 lm	18 W	3000K	Ra80	On/Off, DALI	B1-U0-G0
LW7036.519-EN-N-N-700-830	[N-N] Narrow (Up & Down) - 26°	1698 lm	18 W	3000K	Ra80	On/Off, DALI	B1-U0-G0
LW7036.519-EN-MN-MN-700-830	[MN-MN] Medium Narrow (Up & Down) - 42°	1367 lm	18 W	3000K	Ra80	On/Off, DALI	B1-U0-G0
LW7036.519-EN-M-M-700-830	[M-M] Medium (Up & Down) - 60°	1219 lm	18 W	3000K	Ra80	On/Off, DALI	B1-U0-G0
LW7036.519-EN-S-S-700-740	[S-S] Spot (Up & Down) - 7°	2038 lm	18 W	4000K	Ra70	On/Off, DALI	B1-U1-G0
LW7036.519-EN-N-N-700-740	[N-N] Narrow (Up & Down) - 26°	2038 lm	18 W	4000K	Ra70	On/Off, DALI	B1-U0-G0
LW7036.519-EN-MN-MN-700-740	[MN-MN] Medium Narrow (Up & Down) - 42°	1640 lm	18 W	4000K	Ra70	On/Off, DALI	B1-U0-G0
LW7036.519-EN-M-M-700-740	[M-M] Medium (Up & Down) - 60°	1463 lm	18 W	4000K	Ra70	On/Off, DALI	B1-U0-G0
LW7036.519-EN-S-S-700-840	[S-S] Spot (Up & Down) - 7°	1906 lm	18 W	4000K	Ra80	On/Off, DALI	B1-U0-G0
LW7036.519-EN-N-N-700-840	[N-N] Narrow (Up & Down) - 26°	1906 lm	18 W	4000K	Ra80	On/Off, DALI	B1-U0-G0
LW7036.519-EN-MN-MN-700-840	[MN-MN] Medium Narrow (Up & Down) - 42°	1534 lm	18 W	4000K	Ra80	On/Off, DALI	B1-U0-G0
LW7036.519-EN-M-M-700-840	[M-M] Medium (Up & Down) - 60°	1368 lm	18 W	4000K	Ra80	On/Off, DALI	B1-U0-G0