
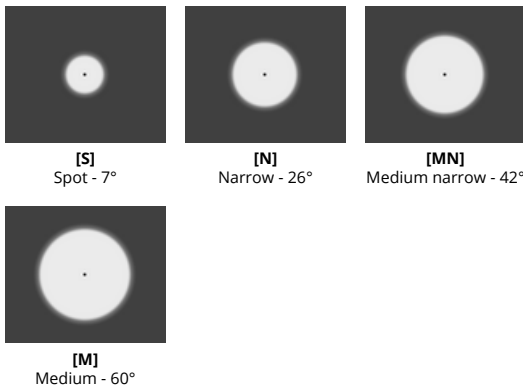


PUNTO S W

LW8017.693-EN

CE UKCA IK08 IP65

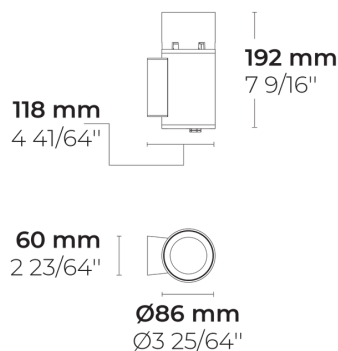

Light distribution	[S] 7°, [N] 26°, [MN] 42°, [M] 60°
Luminaire luminous flux	606 - 1019 lm
Rated input power	10 W
CCT	2700K, 3000K, 4000K
CRI	Ra70, Ra80
Control	On/Off, DALI
Product colours	
Luminaire efficacy	60 - 101 lm/W
Colour deviation	3 SDCM, 4 SDCM
BUG rating	B1-U0-G0
Lifetime L90B50 (hour)	>72, 600
Housing	Marine grade aluminum housing
Driver	Integral LED driver
Input voltage	220-240V 50/60Hz

Extras

Consult the factory	120-277V 50/60Hz
---------------------	------------------

Technical details

Certificates	CE, UKCA
Mounting	Wall mountable
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Insulation class	Class I
Weight	1.27 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver surge protection	1/1 kV
Power factor	> 0.91
Through wiring	Single cable entry
Operating temperature	-25...50°C
Cable	0.2 m of flexible cable

HEPER HQ - HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2,
Malıköy, Temelli, Sincan, 06909
Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 2372 568 7570
infoEU@hepergroup.com
www.heperlighting.com/de

We reserve the right to change specifications without prior written notice. Edition: 14.01.2026. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.


Project name				Type		Quantity	
Date		Note					

LW8017.693-EN-__-__-__-__-EN-C1-__-__

Light distribution	Rated input power	Colour temperature	Control	Product colours
[S] Spot - 7° [N] Narrow - 26° [MN] Medium narrow - 42° [M] Medium - 60°	[700] 10 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[HM1]  Black [HM2]  Dark grey [HM3]  Anthracite grey [HM4]  Light grey [HM5]  White [HM6]  Bronze [CC]  Custom colour (Please specify RAL code)
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Optical accessories			
[UNI] 120-277V 50/60Hz	[007502282] Visor for PUNTO S			

Accessories (To be ordered separately)

Optical accessories



Visor for PUNTO S

007502282

Variant code	Light distribution	Luminaire luminous flux	Rated input power	CCT	CRI	Control	BUG rating
LW8017.693-EN-S-700-827	[S] Spot - 7°	837 lm	10 W	2700K	Ra80	On/Off, DALI	B1-U0-G0
LW8017.693-EN-N-700-827	[N] Narrow - 26°	837 lm	10 W	2700K	Ra80	On/Off, DALI	B1-U0-G0
LW8017.693-EN-MN-700-827	[MN] Medium narrow - 42°	686 lm	10 W	2700K	Ra80	On/Off, DALI	B1-U0-G0
LW8017.693-EN-M-700-827	[M] Medium - 60°	606 lm	10 W	2700K	Ra80	On/Off, DALI	B1-U0-G0
LW8017.693-EN-S-700-830	[S] Spot - 7°	849 lm	10 W	3000K	Ra80	On/Off, DALI	B1-U0-G0
LW8017.693-EN-N-700-830	[N] Narrow - 26°	849 lm	10 W	3000K	Ra80	On/Off, DALI	B1-U0-G0
LW8017.693-EN-MN-700-830	[MN] Medium narrow - 42°	697 lm	10 W	3000K	Ra80	On/Off, DALI	B1-U0-G0
LW8017.693-EN-M-700-830	[M] Medium - 60°	615 lm	10 W	3000K	Ra80	On/Off, DALI	B1-U0-G0
LW8017.693-EN-S-700-740	[S] Spot - 7°	1019 lm	10 W	4000K	Ra70	On/Off, DALI	B1-U0-G0
LW8017.693-EN-N-700-740	[N] Narrow - 26°	1019 lm	10 W	4000K	Ra70	On/Off, DALI	B1-U0-G0
LW8017.693-EN-MN-700-740	[MN] Medium narrow - 42°	738 lm	10 W	4000K	Ra70	On/Off, DALI	B1-U0-G0
LW8017.693-EN-M-700-740	[M] Medium - 60°	738 lm	10 W	4000K	Ra70	On/Off, DALI	B1-U0-G0
LW8017.693-EN-S-700-840	[S] Spot - 7°	953 lm	10 W	4000K	Ra80	On/Off, DALI	B1-U0-G0
LW8017.693-EN-N-700-840	[N] Narrow - 26°	953 lm	10 W	4000K	Ra80	On/Off, DALI	B1-U0-G0
LW8017.693-EN-MN-700-840	[MN] Medium narrow - 42°	782 lm	10 W	4000K	Ra80	On/Off, DALI	B1-U0-G0
LW8017.693-EN-M-700-840	[M] Medium - 60°	690 lm	10 W	4000K	Ra80	On/Off, DALI	B1-U0-G0