



HIP H LP RADII SUS

SUSPENDED PROFILES


DARKON

THE EDGE OF LIGHT




AVAILABLE IN
90° OR 180° ARCS AS STANDARD
NOTE: CUSTOM SIZES AND ANGLES REQUIRE TOOLING FEE

RADIUS IN HORIZONTAL PLANE ONLY (I.E. LENS IS DOWN)
RADIUS NOT AVAILABLE IN VERTICAL PLANE




SURFACE MOUNTED
CEILING PLATE




RECESSED
CEILING PLATE

RECESSED
CEILING PLATE
CUT OUT



Ø102mm



INTEGRAL
DRIVER

DESIGN FEATURES

- Custom sizes available with tooling fee
- Dot free homogeneous illumination
- Lap join milling - No light bleed
- Screwless end caps
- Multiple fixed output options
- Zhaga compliant LED
- Up to 112 exit lumens per system watt
- 90+ colour rendering, 80+ available upon request
- High colour tolerance Macadam 3
- Complies with AS/NZS 60598.2.1
- L80 / F10 = 72,000 hours @ 450mA / 75°C TA
- Detailed shop drawings
- Australian made
- Supplied 100% pre-built
- Plug and Play wire looms
- 5 year warranty
- 10 year extended warranty optional
- Project specific labelling referencing type numbers

LUMEN PERFORMANCE

TRIDONIC LLE24 FIXED WHITE LED [DIRECT]

HE	200mA	10 W p/mtr	946 lm p/mtr
HE	250mA	12 W p/mtr	1173 lm p/mtr
HE	300mA	14 W p/mtr	1396 lm p/mtr
HE	350mA	16 W p/mtr	1614 lm p/mtr
HE	400mA	18 W p/mtr	1828 lm p/mtr
HE	450mA	20 W p/mtr	2036 lm p/mtr
HE	500mA	23 W p/mtr	2248 lm p/mtr
HO	200mA	17 W p/mtr	1893 lm p/mtr
HO	350mA	30 W p/mtr	3186 lm p/mtr
HO	500mA	43 W p/mtr	4374 lm p/mtr

TRIDONIC LLE24 FIXED WHITE LED [INDIRECT]

HE	200mA	10 W p/mtr	995 lm p/mtr
HE	350mA	16 W p/mtr	1697 lm p/mtr
HO	200mA	17 W p/mtr	1990 lm p/mtr
HO	350mA	30 W p/mtr	3349 lm p/mtr

SYSTEM WATTAGE & EXIT LUMENS
TESTED WITH OPAL V / WHITE FINISH / 4000K

OPTIONS

- FINISH:** White / Black
- CEILING PLATE FINISH:** White / Black
- CEILING PLATE TYPE:** Surface Mounted / Recessed
- SUSPENSION TYPE:** 2m Wire / 4m Wire
- LENS DOWN:** Opal V
- LENS UP:** Opal V
- LED DOWN:** HE / HO / Tunable White
- CURRENT DOWN:** 200 / 250 / 300 / 350 / 400 / 450 / 500mA
- LED UP:** HE / HO / Tunable White
- CURRENT UP:** 200 / 250 / 300 / 350 / 400 / 450 / 500mA
- COLOUR TEMP:** 2700K / 3000K / 4000K / (2700K-6500K)
- UP/DOWN:** Single Control / Separately Controlled
- DIMMING:** Non Dim / DALI / DSI / Switch Dim / Casambi

NOTES: R402MM REQUIRES REMOTE DRIVER

PROJECT:

TYPE NO.:

QTY:

REV: 01/10/26

DARKON.COM.AU



HIP H LP RADII SUS

SUSPENDED PROFILES

DARKON
THE EDGE OF LIGHT




STANDARD RADII SIZES

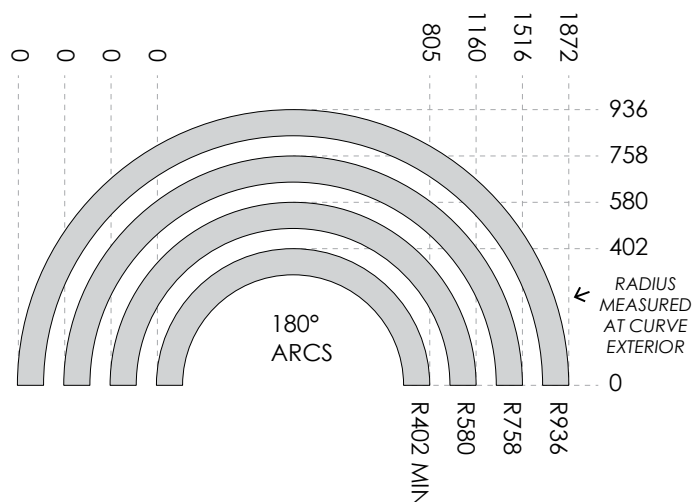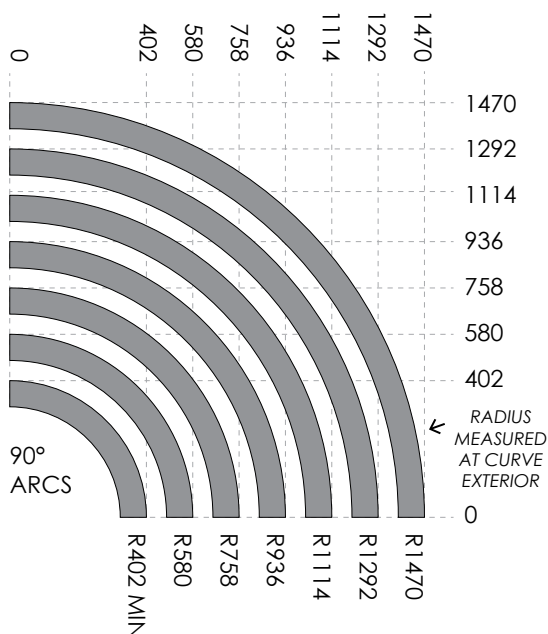


NOTE: CUSTOM SIZES & ANGLES REQUIRE TOOLING FEE

EXAMPLES OF OPEN SHAPES

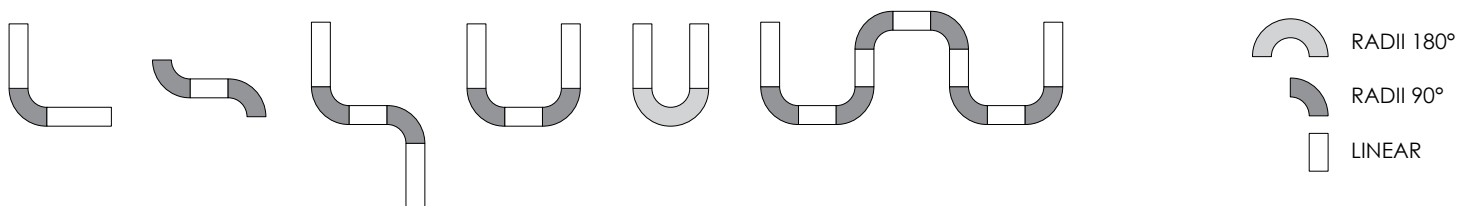

EXAMPLES OF CLOSED SHAPES

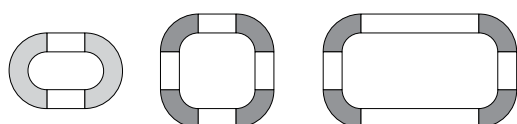

PROJECT: TYPE NO.: QTY:

REV: 01/10/26

DARKON.COM.AU