


# HIP H LP RADII RING SUS

## SUSPENDED PROFILES

# DARKON

THE EDGE OF LIGHT

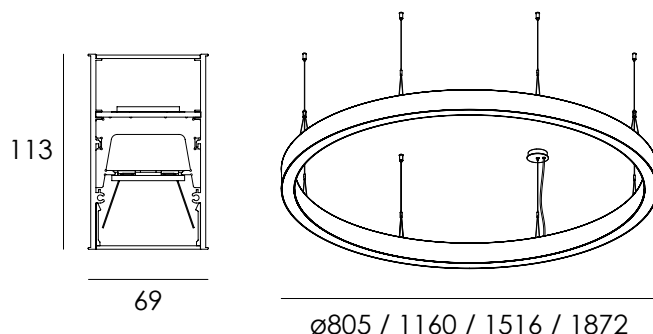

RINGS ARE FABRICATED FROM MULTIPLE PIECES & WELDED TOGETHER FOR A SEAMLESS FINISH.  
CUSTOM SIZE REQUIRES TOOLING FEE.



SURFACE MOUNTED  
CEILING PLATE



RECESSED  
CEILING PLATE



RECESSED  
CEILING PLATE  
CUT OUT  
Ø102mm



INTEGRAL  
DRIVER

## DESIGN FEATURES

- Custom sizes available with tooling fee
- Dot free homogeneous illumination
- Multiple fixed output options
- Zhaga compliant LED
- Up to 112 exit lumens per system watt
- 90+ colour rendering, 80+ available upon request
- High colour tolerance Macadam 3
- Complies with AS/NZS 60598.2.1
- L80 / F10 = 72,000 hours @ 450mA / 75°C TA

- Detailed shop drawings
- Australian made
- Supplied 100% pre-built
- Plug and Play wire looms
- 5 year warranty
- 10 year extended warranty optional
- Project specific labelling referencing type numbers

## LUMEN PERFORMANCE

### TRIDONIC LLE24 FIXED WHITE LED [DIRECT]

|    |       |            |               |
|----|-------|------------|---------------|
| HE | 200mA | 10 W p/mtr | 946 lm p/mtr  |
| HE | 250mA | 12 W p/mtr | 1173 lm p/mtr |
| HE | 300mA | 14 W p/mtr | 1396 lm p/mtr |
| HE | 350mA | 16 W p/mtr | 1614 lm p/mtr |
| HE | 400mA | 18 W p/mtr | 1828 lm p/mtr |
| HE | 450mA | 20 W p/mtr | 2036 lm p/mtr |
| HE | 500mA | 23 W p/mtr | 2248 lm p/mtr |
| HO | 200mA | 17 W p/mtr | 1893 lm p/mtr |
| HO | 350mA | 30 W p/mtr | 3186 lm p/mtr |
| HO | 500mA | 43 W p/mtr | 4374 lm p/mtr |

### TRIDONIC LLE24 FIXED WHITE LED [INDIRECT]

|    |       |            |               |
|----|-------|------------|---------------|
| HE | 200mA | 10 W p/mtr | 995 lm p/mtr  |
| HE | 350mA | 16 W p/mtr | 1697 lm p/mtr |
| HO | 200mA | 17 W p/mtr | 1990 lm p/mtr |
| HO | 350mA | 30 W p/mtr | 3349 lm p/mtr |

SYSTEM WATTAGE & EXIT LUMENS  
TESTED WITH OPAL V / WHITE FINISH / 4000K

## OPTIONS

- FINISH:** White / Black  
**CEILING PLATE FINISH:** White / Black  
**CEILING PLATE TYPE:** Surface Mounted / Recessed  
**SUSPENSION TYPE:** 2m Wire / 4m Wire  
**LENS DOWN:** Opal V  
**LENS UP:** Opal V  
**LED DOWN:** HE / HO / Tunable White  
**CURRENT DOWN:** 200 / 250 / 300 / 350 / 400 / 450 / 500mA  
**LED UP:** HE / HO / Tunable White  
**CURRENT UP:** 200 / 250 / 300 / 350 / 400 / 450 / 500mA  
**COLOUR TEMP:** 2700K / 3000K / 4000K / (2700K-6500K)  
**UP/DOWN:** Single Control / Separately Controlled  
**DIMMING:** Non Dim / DALI / DSI / Switch Dim / Casambi

**NOTES:** Ø805MM REQUIRES REMOTE DRIVER

PROJECT:

TYPE NO.:

QTY:

REV: 01/10/26

DARKON.COM.AU