


GRADII NEON SUS



SUSPENDED PROFILES

DARKON

THE EDGE OF LIGHT

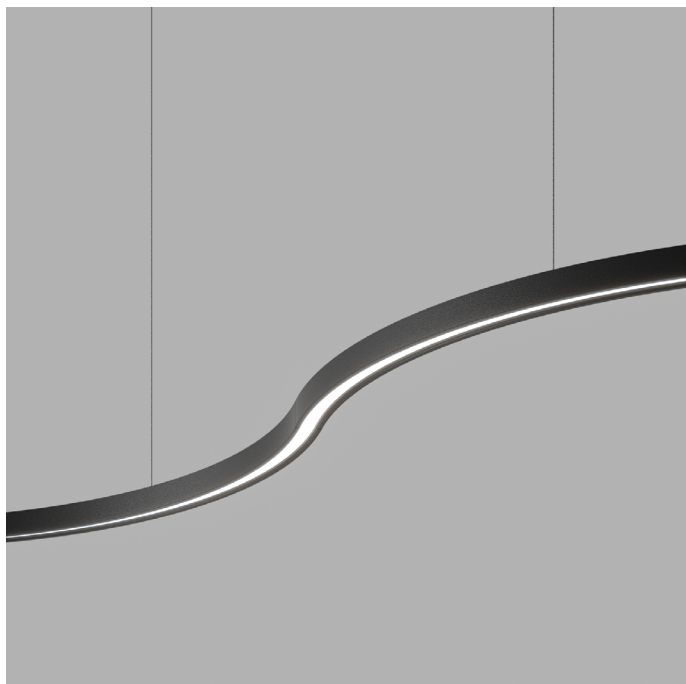

IP67



ARCS AVAILABLE IN
CUSTOM ANGLES AND RADII

RADIUS IN HORIZONTAL PLANE ONLY (I.E. LENS IS DOWN)
RADIUS NOT AVAILABLE IN VERTICAL PLANE



SURFACE MOUNTED
CEILING PLATE



RECESSED
CEILING PLATE



RECESSED
CEILING PLATE
CUT OUT
Ø102mm



REMOTE
DRIVER

DESIGN FEATURES

- Curves available in custom sizes to suit project requirements
- Utilises silicone Neon LED
- In-house Neon LED length customisation
- In-house Neon LED moulded end caps
- IP67 ingress protection
- Dot free homogeneous illumination
- Dust free matt finish silicone
- Multiple fixed output options
- Up to 92 exit lumens per system watt
- 90+ colour rendering
- 10m max single length of LED with single power feed (White)
- 5m max single length of LED with single power feed (TW / RGB/W)
- Max single length doubles with dual power feed option

- UV protected
- Screwless end caps
- Complies with AS/NZS 60598.2.1
- 50,000 hrs lifetime
- L70B50 > 50,000 hrs
- 5 year warranty
- Project specific labelling referencing type numbers
- Detailed shop drawings
- Miter joins are not available

LUMEN PERFORMANCE

T1616 NEON LED

20.1 W p/mtr 1584 lm p/mtr

SYSTEM WATTAGE & EXIT LUMENS
TESTED WITH WHITE FINISH AT 4000K

OPTIONS

- INT FINISH:** White / Black / Silver / Gold / Custom
EXT FINISH: White / Black / Silver / Gold / Custom
CEILING PLATE FINISH: White / Black
CEILING PLATE TYPE: Surface Mounted / Recessed
SUSPENSION TYPE: 2m Wire / 4m Wire
COLOUR TEMP: 2700K / 3000K / 4000K / TW / RGB / RGBW
DRIVER: Non Dim / DALI Dim / DMX

PROJECT:

TYPE NO.:

QTY:

REV: 18/08/26

DARKON.COM.AU