


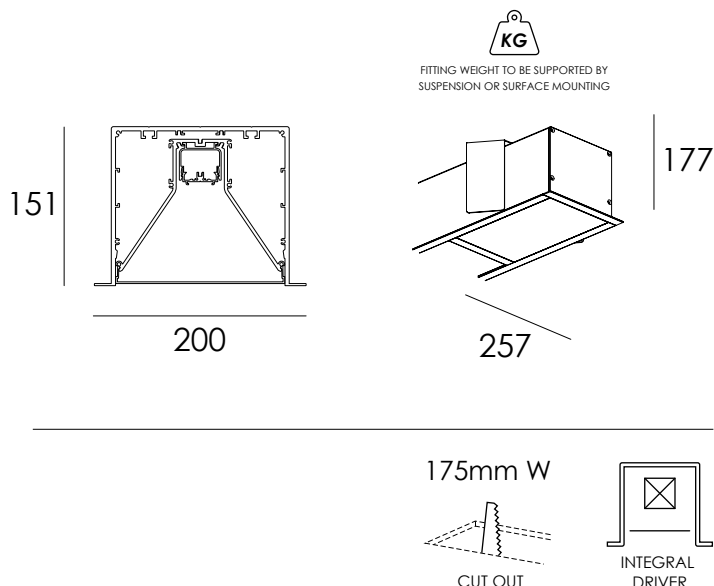

DESIGN FEATURES

- Dot free homogeneous illumination
- Multiple fixed output options
- Multiple lens options
- IP55 light modules factory sealed
- Blind cover required between light modules
- Can accommodate emergency lighting
- Can accommodate EWIS speakers
- Zhaga compliant LED
- Up to 103 lumens per system watt
- 80+ or 90+ colour rendering
- High colour tolerance Macadam 3
- Complies with AS/NZS 60598.2.1
- L80 / F10 = 72,000 hours @ 450mA / 75°C TA
- Detailed shop drawings
- Australian made
- Supplied 100% pre-built
- 5 year warranty
- 10 year extended warranty optional
- Project specific labelling referencing type numbers
- Fitting weight to be supported via rear sus or sm fixing
- Recess spring clips hold trim to plaster (not weight bearing)

LUMEN PERFORMANCE

TRIDONIC LLE24 FIXED WHITE G5 LED

HE	200mA	10 W p/mtr	978 lm p/mtr
HE	250mA	12 W p/mtr	1215 lm p/mtr
HE	300mA	14 W p/mtr	1442 lm p/mtr
HE	350mA	16 W p/mtr	1668 lm p/mtr
HE	400mA	18 W p/mtr	1888 lm p/mtr
HE	450mA	21 W p/mtr	2104 lm p/mtr
HE	500mA	23 W p/mtr	2314 lm p/mtr
HE	550mA	25 W p/mtr	2521 lm p/mtr
HE	600mA	28 W p/mtr	2725 lm p/mtr
HE	650mA	30 W p/mtr	2928 lm p/mtr
HO	350mA	30 W p/mtr	3319 lm p/mtr
HO	400mA	34 W p/mtr	3740 lm p/mtr

SYSTEM WATTAGE & EXIT LUMENS
TESTED WITH OPAL V / WHITE FINISH / 4000K

OPTIONS

- FINISH:** White / black / silver
LENS: Opal V / Deglaring / Asymmetric
LED: HE / HO
CURRENT: 200mA / 250mA / 300mA / 350mA / 400mA / 450mA / 500mA / 550mA / 600mA / 650mA
COLOUR TEMP: 2700K / 3000K / 4000K
DIMMING: Non Dim / DALI / DSI / Switch Dim