# MRS. SPIN SUS
*SUSPENDED LUMINAIRES*

DARKON
THE EDGE OF LIGHT

IP44 ARRAY OPAL

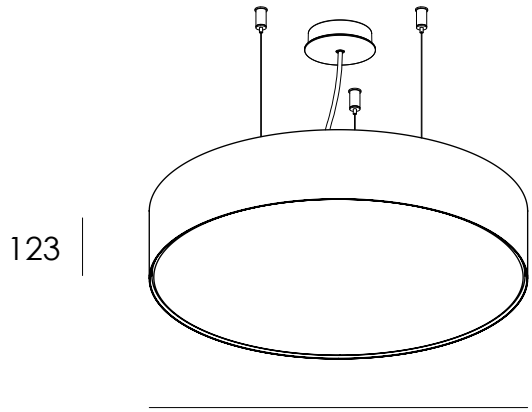


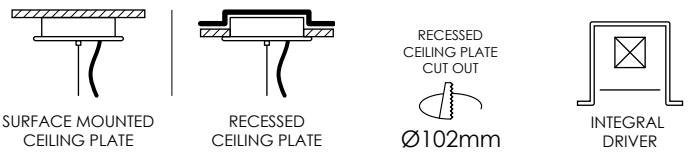


## DESIGN FEATURES

- Large opal diffuser for low glare applications
- Minimal trim for a 'trim-less' appearance
- up to 97 exit lumens per system watt
- 90+ colour rendering
- High colour tolerance Macadam 3
- Complies with AS/NZS 60598.2.1
- L80 / F10 = 72,000 hours @ 350mA / 65°C TP
- L80 / F10 = 72,000 hours @ 450mA / 65°C TP
- Removable internal assembly for ease of maintenance
- Australian designed and assembled
- Supplied 100% pre-built
- 5 year warranty
- 10 year extended warranty optional
- Project specific labelling referencing type numbers
- Easy to follow install guide

## LUMEN PERFORMANCE

**TRIDONIC CLE SHALLOW G2 LED**

| | | | |
|---|---|---|---|
| 600: | 225mA | 33 W | 3151 lm |
| 600: | 350mA | 52 W | 4853 lm |
| 600: | 500mA | 74 W | 6848 lm |
| 900: | 500mA | 72 W | 6904 lm |
| 900: | 775mA | 111 W | 10685 lm |
| 900: | 1200mA | 174 W | 16389 lm |
| 1200: | 500mA | 133 W | 12849 lm |
| 1200: | 775mA | 206 W | 20050 lm |
| 1200: | 1200mA | 322 W | 30356 lm |

*SYSTEM WATTAGE / EXIT LUMENS 4000K*

## OPTIONS

**SIZE:** 600 / 900 / 1200
**FINISH:** White / Black
**600 CURRENT:** 225mA / 350mA / 500mA
**900 CURRENT:** 500mA / 775mA / 1200mA
**1200 CURRENT:** 500mA / 775mA / 1200mA
**COLOUR TEMP:** 3000K / 4000K
**DIMMING:** Non Dim / DALI / DSI / Switch Dim

PROJECT: TYPE NO.: QTY: