


MRS.T RADII RING SUS

SUSPENDED PROFILES

DARKON

THE EDGE OF LIGHT

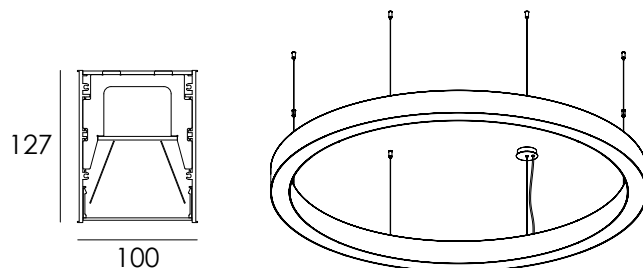

Ø856 / 1214 / 1572 / 1928

RINGS ARE FABRICATED FROM MULTIPLE PIECES & WELDED TOGETHER FOR A SEAMLESS FINISH.
CUSTOM SIZE REQUIRES TOOLING FEE.



SURFACE MOUNTED
CEILING PLATE



RECESSED
CEILING PLATE



RECESSED
CEILING PLATE
CUT OUT
Ø102mm



INTEGRAL
DRIVER

DESIGN FEATURES

- Dot free homogeneous illumination
- Screwless end caps
- Multiple fixed output options
- Zhaga compliant LED
- Up to 107 exit lumens per system watt
- 90+ colour rendering, 80+ available upon request
- High colour tolerance Macadam 3
- Complies with AS/NZS 60598.2.1
- L80 / F10 = 72,000 hours @ 450mA / 75°C TA
- Detailed shop drawings
- Australian made
- Supplied 100% pre-built
- Plug and Play wire looms
- 5 year warranty
- 10 year extended warranty optional
- Project specific labelling referencing type numbers

LUMEN PERFORMANCE

TRIDONIC LLE24 FIXED WHITE LED [DIRECT]

HE	200mA	10 W p/mtr	903 lm p/mtr
HE	250mA	12 W p/mtr	1120 lm p/mtr
HE	300mA	14 W p/mtr	1332 lm p/mtr
HE	350mA	16 W p/mtr	1540 lm p/mtr
HE	400mA	18 W p/mtr	1744 lm p/mtr
HE	450mA	20 W p/mtr	1943 lm p/mtr
HE	500mA	23 W p/mtr	2145 lm p/mtr
HO	200mA	17 W p/mtr	1807 lm p/mtr
HO	250mA	21 W p/mtr	2230 lm p/mtr
HO	300mA	26 W p/mtr	2641 lm p/mtr
HO	350mA	30 W p/mtr	3040 lm p/mtr
HO	400mA	34 W p/mtr	3422 lm p/mtr
HO	450mA	38 W p/mtr	3795 lm p/mtr
HO	500mA	43 W p/mtr	4173 lm p/mtr

SYSTEM WATTAGE & EXIT LUMENS
TESTED WITH OPAL V / WHITE FINISH / 4000K

OPTIONS

- FINISH:** White / Black
CEILING PLATE FINISH: White / Black
CEILING PLATE TYPE: Surface Mounted / Recessed
SUSPENSION TYPE: 2m Wire / 4m Wire
LENS: Opal V
LED: HE / HO / Tunable white (2700K-6500K)
CURRENT: 200 / 250 / 300 / 350 / 400 / 450 / 500mA
COLOUR TEMP: 2700K / 3000K / 4000K
UP / DOWN: Single Control / Separately Controlled
DIMMING: Non Dim / DALI / DSI / Switch Dim

NOTES: R428MM REQUIRES REMOTE DRIVER

PROJECT:

TYPE NO.:

QTY:

REV: 13/10/25

DARKON.COM.AU