
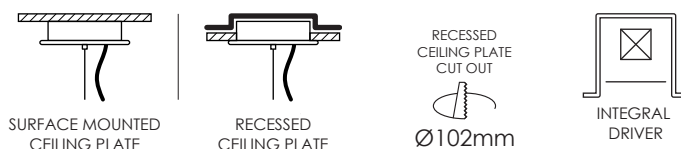


# SLIM TRADIE UP SUS

## SUSPENDED PROFILES

# DARKON

THE EDGE OF LIGHT

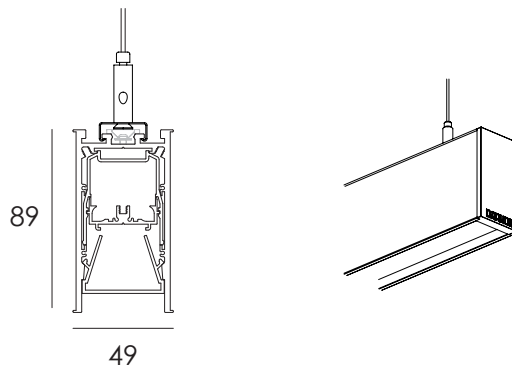

## DESIGN FEATURES

- Sliding 'sus saddle' detail for adjustable suspension spacing
- Recessed lens to help reduce glare
- Lap join milling for Light Bleed free joints
- Integrated uplight
- Low glare UGR≤19
- Dot free homogeneous illumination
- Multiple fixed output options
- Multiple snap fit lens options
- Zhaga compliant
- Up to 95 exit lumens per system watt
- 90+ colour rendering, 80+ available upon request
- High colour tolerance - MacAdam 3
- L80 / F10 = 72,000 hours @ 450mA / 75°C TA
- Complies with AS/NZS 60598.2.1
- Detailed shop drawings
- Australian made
- Supplied 100% pre-built
- Snap fit gear tray with integrated driver
- Plug and play wire looms
- Sprung loaded control joints
- 5 year warranty
- 10 year extended warranty optional
- Project specific labelling referencing type numbers
- Miter joints available
- Welded mitre joints eliminate light bleed
- Factory fitted "push to join" installation

## LUMEN PERFORMANCE

### TRIDONIC LLE24 FIXED WHITE LED [DIRECT]

|          |       |               |            |
|----------|-------|---------------|------------|
| HE CRI90 | 200mA | 828 lm p/mtr  | 10 W p/mtr |
| HE CRI90 | 250mA | 1028 lm p/mtr | 12 W p/mtr |
| HE CRI90 | 300mA | 1225 lm p/mtr | 14 W p/mtr |
| HE CRI90 | 350mA | 1414 lm p/mtr | 16 W p/mtr |
| HE CRI90 | 400mA | 1601 lm p/mtr | 18 W p/mtr |
| HE CRI90 | 450mA | 1785 lm p/mtr | 21 W p/mtr |
| HE CRI90 | 500mA | 1968 lm p/mtr | 23 W p/mtr |

|          |       |               |            |
|----------|-------|---------------|------------|
| HO CRI90 | 200mA | 1652 lm p/mtr | 17 W p/mtr |
| HO CRI90 | 250mA | 2039 lm p/mtr | 21 W p/mtr |
| HO CRI90 | 300mA | 2415 lm p/mtr | 26 W p/mtr |
| HO CRI90 | 350mA | 2780 lm p/mtr | 30 W p/mtr |

### T1607 NEON LED [INDIRECT]

|          |     |               |            |
|----------|-----|---------------|------------|
| HE CRI90 | 24V | 1228 lm p/mtr | 12 W p/mtr |
|----------|-----|---------------|------------|

SYSTEM WATTAGE & EXIT LUMENS  
TESTED WITH OPAL V / WHITE FINISH / 4000K

## OPTIONS

- FINISH:** White / Black / Silver / Gold / Custom
- CEILING PLATE FINISH:** White / Black
- CEILING PLATE TYPE:** Surface Mounted / Recessed
- SUSPENSION TYPE:** 2m Wire / 4m Wire / White Rod / Black Rod
- LENS DOWN:** Opal V / Deglaring / Asymmetric / Narrow
- LED DOWN:** HE / HO / Tunable white
- CURRENT DOWN:** 200 / 250 / 300 / 350 / 400 / 450 / 500mA
- COLOUR TEMP DOWN:** 2700K / 3000K / 4000K / TW 2700-6500K
- LED UP:** T1607 Neon
- COLOUR TEMP UP:** 2700K / 3000K / 4000K
- DIMMING:** Non Dim / DALI / DSI / Switch Dim / Casambi

PROJECT:

TYPE NO.:

QTY:

REV: 10/08/26

DARKON.COM.AU