



TRIM RADII REC


RECESSED PROFILES

DARKON

THE EDGE OF LIGHT



285MM STRAIGHT SECTIONS
WELDED TO ALL RADII ARCS



AVAILABLE IN
90° OR 180° ARCS AS STANDARD

NOTE: CUSTOM SIZES AND ANGLES REQUIRE TOOLING FEE

RADIUS IN HORIZONTAL PLANE ONLY (I.E. LENS IS DOWN)
RADIUS NOT AVAILABLE IN VERTICAL PLANE

CUT OUT



100mm W



INTEGRAL
DRIVER

DESIGN FEATURES

- Custom radius available
- Dot free homogeneous illumination
- Screwless end caps
- Multiple fixed output options
- Zhaga compliant LED
- Up to 83 exit lumens per system watt
- 80+ or 90+ colour rendering
- High colour tolerance Macadam 3
- Complies with AS/NZS 60598.2.1
- L80 / F10 = 72,000 hours @ 450mA / 75°C TA

INSTALLATION FEATURES

- Detailed shop drawings
- Australian made
- Supplied 100% pre-built
- Plug and Play wire looms
- Sprung loaded control joints
- 5 year warranty
- 10 year extended warranty optional
- Project specific labelling referencing type numbers

LUMEN PERFORMANCE

TRIDONIC LLE24 FIXED WHITE G5 LED

HE	350mA	16 W p/mtr	1256 lm p/mtr
HE	400mA	18 W p/mtr	1438 lm p/mtr
HE	450mA	21 W p/mtr	1602 lm p/mtr
HE	500mA	23 W p/mtr	1755 lm p/mtr
HO	350mA	30 W p/mtr	2504 lm p/mtr
HO	400mA	35 W p/mtr	2861 lm p/mtr
HO	450mA	39 W p/mtr	3160 lm p/mtr
HO	500mA	43 W p/mtr	3441 lm p/mtr

SYSTEM WATTAGE & EXIT LUMENS

TESTED WITH OPAL V / WHITE FINISH / 4000K

CONFIGURATOR

FINISH: White / black

LENS: Opal V

LED: HE / HO / Tunable white (2700K-6500K)

CURRENT: 350mA / 400mA / 450mA / 500mA

COLOUR TEMP: 2700K* / 3000K / 4000K

DIMMING: Non Dim / DALI / DSI / Switch Dim

NOTES: R433MM REQUIRES REMOTE DRIVER

PROJECT:



TYPE NO.:

QTY:

REV: 07/05/24


DARKON.COM.AU

STANDARD RADII SIZES

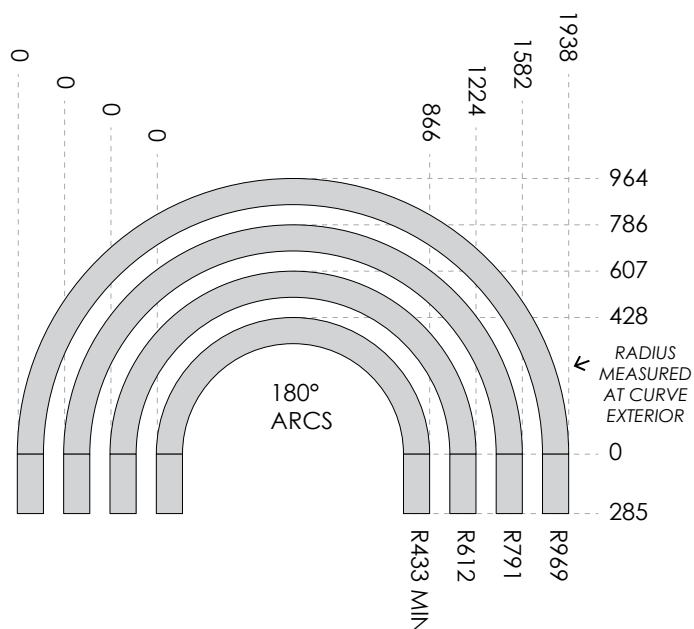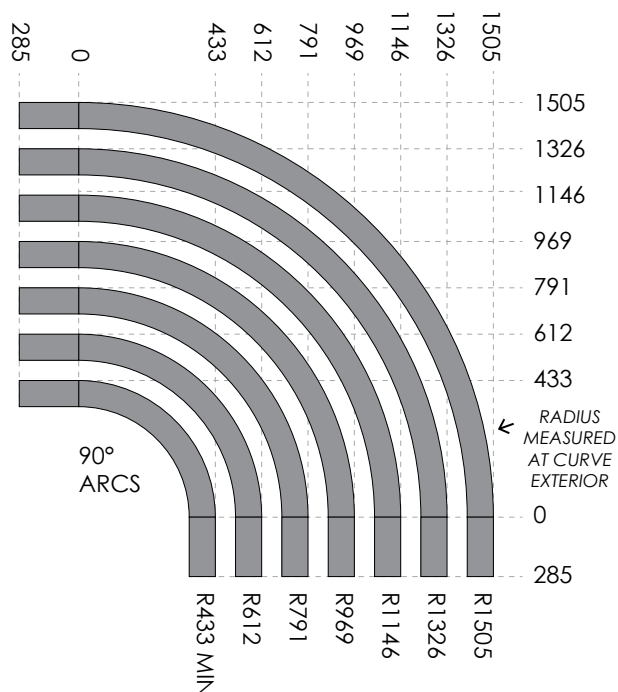

NOTE: CUSTOM SIZES & ANGLES REQUIRE TOOLING FEE

EXAMPLES OF OPEN SHAPES

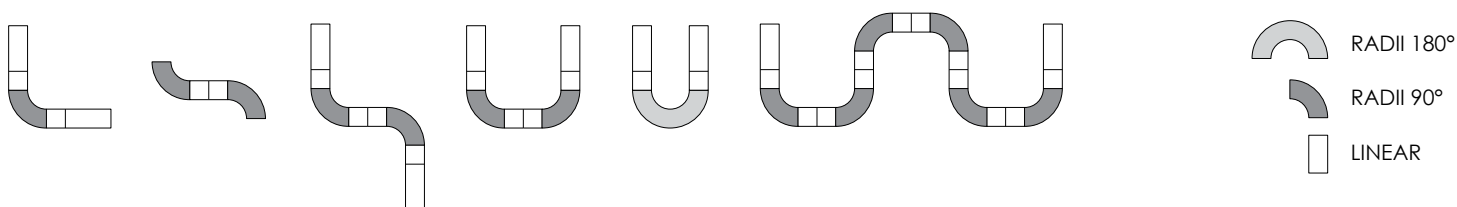

EXAMPLES OF CLOSED SHAPES

