



TRIPLE DOWN SM

SURFACE MOUNTED LUMINAIRES

DARKON

THE EDGE OF LIGHT

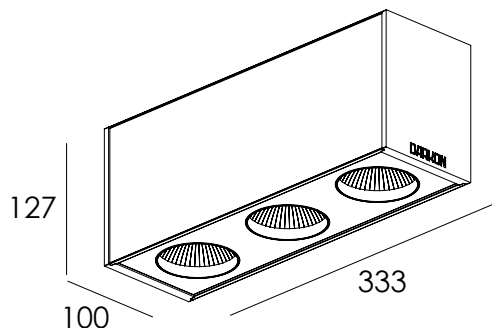

DESIGN FEATURES

- Integrates into linear profile systems or as stand alone luminaire
- Recessed COB inside optic for reduced glare
- Screwless endcaps
- Up to 105 exit lumens per system watt
- 90+ colour rendering
- High colour tolerance, Macadam 3
- Australian designed and assembled
- Supplied 100% pre-built
- 5 year warranty
- 10 year extended warranty optional
- Project specific labelling referencing type numbers
- Easy to follow install guide
- Complies with AS/NZS 60598.2.1

- L80 / B10 = 60,000 hours @ 250mA / 85°C TP
- L80 / B10 = 60,000 hours @ 325mA / 85°C TP

LUMEN PERFORMANCE

TRIDONIC SLE 09MM LED

175mA	19.4 W	2035 lm
250mA	27.4 W	2834 lm
325mA	35.9 W	3599 lm

RAW LAMP FLUX AT 55° / 4000K

OPTIONS

FINISH EXT:	White / Black
CURRENT:	175mA / 250mA / 325mA
COLOUR TEMP:	2700K / 3000K / 4000K
OPTIC:	25° / 35° / 55°
DIMMING:	Non Dim / Phase Dim / DALI / DSI / Switch Dim
FLEX:	Flex & plug / No flex & plug

PROJECT:

TYPE NO.:

QTY:

REV: 01/12/25

DARKON.COM.AU