
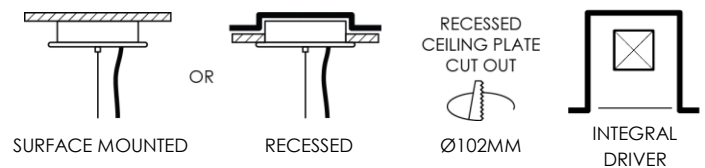


HIP IP67 SUS

SUSPENDED PROFILE

DARKON
THE EDGE OF LIGHT

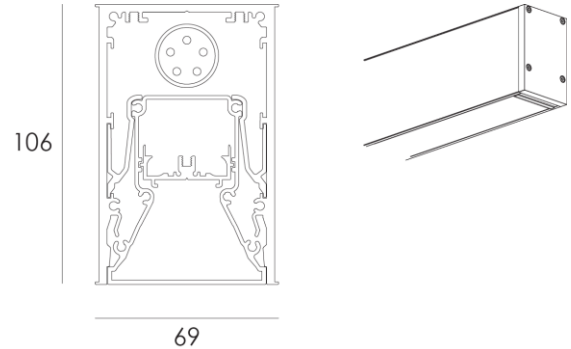

DESIGN FEATURES

- Dot free homogeneous illumination
- Multiple snap fit lens options
- Up to 94 exit lumens per system watt
- High colour tolerance - MacAdam 3
- Complies with AS/NZS 60598.2.1
- Detailed shop drawings
- Supplied 100% pre-built
- Plug and play wire looms
- 5 year warranty
- Project specific labelling referencing type numbers
- Miter joints are not available
- Screwless end caps
- Zhaga compliant
- 90+ colour rendering, 80+ available upon request
- L80 / F10 = 72,000 hours @ 450mA / 75°C TA
- Lap join milling - No Light Bleed
- Australian made
- Snap fit gear tray with integrated driver
- Spring loaded control joints
- 10 year extended warranty optional
- Approximate fitting weight of 4.9 Kg per/m.
- Fitting is IK10 rated

LUMEN PERFORMANCE

TRIDONIC FIXED WHITE / EXIT LUMENS

HE CRI90	200mA	891 lm p/mtr	10 W p/mtr
HE CRI90	250mA	1105 lm p/mtr	12 W p/mtr
HE CRI90	300mA	1315 lm p/mtr	14 W p/mtr
HE CRI90	350mA	1523 lm p/mtr	17 W p/mtr
HE CRI90	400mA	1722 lm p/mtr	19 W p/mtr
HE CRI90	450mA	1919 lm p/mtr	21 W p/mtr
HE CRI90	500mA	2117 lm p/mtr	23 W p/mtr

Tested with white finish / 4K / Opal V lens

OPTIONS

FINISH: Black / White / Silver / Gold / Custom

CEILING PLATE FINISH: White / Black

CEILING PLATE TYPE: Surface mounted / Recessed

SUSPENSION TYPE: 2m wire / 4m wire

LENS: Opal V / Deglaring / Asymmetric / Narrow

LED: HE

CURRENT: 200 / 250 / 300 / 350 / 400 / 450 / 500 / 550mA

TEMP: 2700K / 3000K / 4000K / (2700K-6500K)

DIMMING: Non dim / DALI dim / SwitchDIM / DSI dim / Casambi

PROJECT:

REV: 4/08/2026

TYPE NO:

QTY:

DARKON.COM.AU